




Catalog Number 73030-73033
UPC Number See Table
Description Combination Exit/Emergency Light
 LED Sign
 Incandescent Lamps

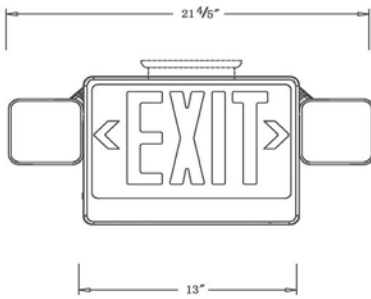

Features

- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Designs in Neutral Finish
- Push to Test Switch
- 6-Volt Maintenance Free Lead Acid Battery
- Environmental Coated, Solid State Charger
- Adjustable Arms Allow Vertical or Horizontal Lamp Orientation
- 2 5.4 Watt Fully Adjustable Glare Free Lamps
- Automatic, Low Voltage Disconnect (LVD)
- Universal Transformer for 120 or 277 VAC
- Universal J-Box Mounting Plate
- Injection Molded, V-O Flame Retardant, High Impact, Thermoplastic Housing
- Integral wiring channels for ease of installation
- Charge Rate/Power on LED Indicator Light
- Rated for Damp Location

Dimension Information

L Inches 22.00
 H Inches 10.00
 W Inches 13.00
 Depth Inches (mm) 2.75

Specifications

Input Rating Amps: .11A @ 120V, .06A @ 277V
 Input Rating Watts: 10W @ 120V 10W @ 277V
 Frequency: 60 Hz
 Lamp Type: 5.4 W Incandescent Wedge Base
 Voltage Rating: 120/277
 Flammability Rating: UL94V-0
 Battery Operation: 6 Volt 4.5 AH Lead Acid - 90 Minutes Minimum

Packaging

Box Qty 1
 Master Carton Qty 6

Certifications

UL UL 924
 cUL No
 RoHS Yes

Cat No.	Led Color	Housing	Case Qty	Each
73030	Red	White	6	
73031	Red	Black	6	
73032	Green	White	6	
73033	Green	Black	6	