


# Copper Short Barrel 1 Hole Compression Lugs

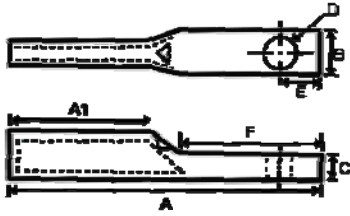

- ▶ High Conductivity Seamless Copper
- ▶ Electro-Tin Plating Resists Corrosion, reduces Contact Resistance for Maximum Conductivity
- ▶ Single Mounting Hole
- ▶ Color Coded Die Index and Crimp Marks Printed on Barrel
- ▶ UL 486A Listed for Applications Thru 35KV

Dimensions = Inches

Cat. No.	Wire Range	Stud Size	Color Code	ID	OD	A	A1	B	C	D	E	F	Box Qty
94010	8 Str.	#10	Red	.173	.272	1.20	.44	.42	.08	.21	.28	.59	80
94012	8 Str.	1/4	Red	.173	.272	1.20	.44	.42	.08	.25	.28	.59	80
94013	8 Str.	5/16	Red	.173	.272	1.20	.44	.42	.08	.33	.28	.59	80
94014	8 Str.	3/8	Red	.173	.272	1.20	.44	.42	.08	.41	.28	.59	80
94016	6 Str.	#10	Blue	.204	.295	1.50	.71	.42	.08	.21	.31	.67	60
94018	6 Str.	1/4	Blue	.204	.295	1.50	.71	.42	.08	.25	.31	.67	60
94020	6 Str.	5/16	Blue	.204	.295	1.50	.71	.42	.08	.33	.31	.67	60
94021	6 Str.	3/8	Blue	.204	.295	1.50	.71	.42	.08	.41	.31	.67	60
94024	4 Str.	#10	Gray	.252	.343	1.50	.71	.49	.08	.21	.31	.67	45
94026	4 Str.	1/4	Gray	.252	.343	1.50	.71	.49	.08	.25	.31	.67	45
94028	4 Str.	5/16	Gray	.252	.343	1.50	.71	.49	.08	.33	.31	.67	45
94030	4 Str.	3/8	Gray	.252	.343	1.50	.71	.56	.08	.41	.31	.67	45
94031	4 Str.	1/2	Gray	.252	.343	1.50	.71	.60	.09	.51	.31	.67	45
94034	2 Str.	1/4	Brown	.315	.421	1.80	.83	.60	.10	.25	.37	.81	25
94036	2 Str.	5/16	Brown	.315	.421	1.80	.83	.60	.10	.33	.37	.81	25
94038	2 Str.	3/8	Brown	.315	.421	1.80	.83	.60	.10	.41	.37	.81	25
94039	2 Str.	1/2	Brown	.315	.421	1.80	.83	.60	.10	.51	.37	.81	25
94042	1 Str.	1/4	Green	.359	.469	1.83	.83	.67	.11	.25	.37	.81	20
94044	1 Str.	5/16	Green	.359	.469	1.83	.83	.67	.11	.33	.37	.81	20
94046	1 Str.	3/8	Green	.359	.469	1.83	.83	.67	.11	.41	.37	.81	20
94047	1 Str.	1/2	Green	.359	.469	1.83	.83	.67	.11	.51	.37	.81	20
94050	1/0 Str.	1/4	Pink	.390	.520	1.83	.83	.74	.13	.25	.37	.81	12
94052	1/0 Str.	5/16	Pink	.390	.520	1.83	.83	.74	.13	.33	.37	.81	12
94054	1/0 Str.	3/8	Pink	.390	.520	1.83	.83	.74	.13	.41	.37	.81	12
94055	1/0 Str.	1/2	Pink	.390	.520	1.83	.83	.74	.13	.51	.37	.81	12
94058	2/0 Str.	1/4	Black	.441	.563	2.24	.94	.81	.12	.25	.47	1.06	10
94060	2/0 Str.	5/16	Black	.441	.563	2.24	.94	.81	.12	.33	.47	1.06	10
94062	2/0 Str.	3/8	Black	.441	.563	2.24	.94	.81	.12	.41	.47	1.06	10
94064	2/0 Str.	1/2	Black	.441	.563	2.24	.94	.81	.12	.51	.47	1.06	10
94066	3/0 Str.	1/4	Orange	.492	.622	2.36	.98	.90	.13	.25	.47	1.06	20
94068	3/0 Str.	5/16	Orange	.492	.622	2.36	.98	.90	.13	.33	.47	1.06	20
94070	3/0 Str.	3/8	Orange	.492	.622	2.36	.98	.90	.13	.41	.47	1.06	20
94072	3/0 Str.	1/2	Orange	.492	.622	2.36	.98	.90	.13	.51	.47	1.06	20
94074	4/0 Str.	1/4	Purple	.547	.689	2.36	.98	1.00	.13	.25	.47	1.06	20
94076	4/0 Str.	5/16	Purple	.547	.689	2.36	.98	1.00	.13	.33	.47	1.06	20
94078	4/0 Str.	3/8	Purple	.547	.689	2.36	.98	1.00	.13	.41	.47	1.06	20
94080	4/0 Str.	1/2	Purple	.547	.689	2.36	.98	1.00	.13	.51	.47	1.06	20
94082	250	3/8	Yellow	.594	.752	2.48	1.06	1.09	.15	.41	.47	1.06	15
94084	250	1/2	Yellow	.594	.752	2.48	1.06	1.09	.15	.51	.47	1.06	15
94086	300	1/2	White	.657	.815	2.49	1.06	1.19	.15	.51	.52	1.06	15
94087	300	5/8	White	.657	.815	2.80	1.06	1.19	.15	.67	.52	1.38	15
94088	350	1/2	Red	.701	.874	2.61	1.10	1.28	.17	.51	.52	1.06	10
94089	350	5/8	Red	.701	.874	2.91	1.10	1.28	.17	.67	.52	1.38	10
94090	400	1/2	Blue	.764	.949	3.08	1.18	1.39	.18	.51	.52	1.38	10
94091	400	5/8	Blue	.764	.949	3.08	1.18	1.39	.18	.67	.52	1.38	10
94094	500	1/2	Brown	.835	1.063	3.28	1.38	1.54	.22	.67	.52	1.38	6
94093	500	5/8	Brown	.835	1.063	3.28	1.38	1.54	.22	.51	.52	1.06	6
94095	600	1/2	Green	.925	1.189	3.50	1.50	1.72	.25	.51	.52	1.46	4
94096	600	5/8	Green	.925	1.189	3.50	1.50	1.72	.25	.67	.69	1.46	4
94098	750	5/8	Black	1.03	1.31	4.37	1.85	1.90	.27	.67	.69	1.85	4
94099	1000	3/4	White	1.15	1.50	5.20	1.93	2.15	.33	.80	.17	1.97	3