

Ground Clamps - I-Beam



- ▶ Connect Ground Conductor to I-Beam or Metal Frame
- ▶ Connects one ground wire to 1/4" thick bar or stanchion
- ▶ Lay-in Feature for Use with Continuous Ground Loops
- ▶ Popular for Cable Tray, Fence Posts & Structural Steel
- ▶ Cast of High Strength High Conductivity Copper Alloy
- ▶ Stainless Steel Bolts, Nuts & Lock Washers
- ▶ UL 467 Listed for Direct Burial In Soil or Concrete



Dimensions = Inches

Cat. No.	Fig	Conductor Range		Dimensions			Bolt Size	Box Qty
		Min	Max	Length	Width	Height		


Ground Conductor Isolated from Bar

91715	1	8 SOL	4 STR	1-1/4	1	1-5/8	3/8	25
91716	1	4 SOL	2/0 STR	1-5/8	1-1/8	1-3/4	3/8	10
91717	1	2/0 SOL	250 MCM	2-1/8	1-1/2	2	1/2	10

Ground Conductor Clamped To Bar

91721	2	8 SOL	4 STR	1-1/4	1	1-5/8	3/8	25
91722	2	4 SOL	2/0 STR	1-5/8	1-1/8	1-3/4	3/8	25
91723	2	2/0 SOL	250 MCM	2-1/8	1-1/2	2	1/2	10

Ground/Neutral Bars

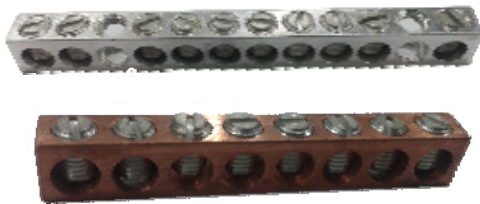

- ▶ Copper & Aluminum Neutral & Ground Bars
- ▶ Aluminum Bars are made from 6060-T6 Tin-Plated Aluminum
- ▶ Aluminum Bars are Dual Rated for Copper or Aluminum Conductors
- ▶ Copper Bars are Rated for Copper Conductors Only
- ▶ Available from 2 Circuit to 190 Circuit Configurations
- ▶ Range Taking
- ▶ 600V



New! Available January 2015

Dimensions = Inches

Cat. No.	Material	Wire Range	No. of Circuits	Total No. Holes	Length	Height	Width	Hole Spacing	Mount Hole Position	Box Qty
----------	----------	------------	-----------------	-----------------	--------	--------	-------	--------------	---------------------	---------

Aluminum

91130	Aluminum	#14 - #4	2	3	.95	.44	.31	.312	2	100
91131	Aluminum	#14 - #4	4	5	1.57	.44	.31	.312	3	100
91132	Aluminum	#14 - #4	5	6	1.88	.44	.31	.312	3	100
91133	Aluminum	#14 - #4	6	7	2.25	.44	.31	.312	4	100
91134	Aluminum	#14 - #4	4	6	1.88	.44	.31	.312	1 & 4	100
91135	Aluminum	#14 - #4	5	7	2.25	.44	.31	.312	1 & 7	100
91136	Aluminum	#14 - #4	5	7	2.25	.44	.31	.312	2 & 6	100
91137	Aluminum	#14 - #4	6	8	2.56	.44	.31	.312	4 & 7	100
91138	Aluminum	#14 - #4	7	9	2.87	.44	.31	.312	3 & 7	100
91139	Aluminum	#14 - #4	9	11	3.50	.44	.31	.312	1 & 11	50
91140	Aluminum	#14 - #4	10	12	3.81	.44	.31	.312	1 & 12	50
91141	Aluminum	#14 - #4	12	14	4.43	.44	.31	.312	1 & 14	50
91142	Aluminum	#14 - #4	15	17	5.37	.44	.31	.312	1 & 17	50
91143	Aluminum	#14 - #4	20	22	6.93	.44	.31	.312	1 & 22	50
91144	Aluminum	#14 - #4	190	190	60.0	.44	.31	.312	-	10
91145	Aluminum	#14 - #2	10	12	4.12	.50	.38	.34	3 & 11	50
91146	Aluminum	#14 - 2/0	2	3	1.75	.75	.56	.60	2	25
91147	Aluminum	#14 - 2/0	3	5	2.95	.75	.56	.60	2 & 4	25
91148	Aluminum	#14 - 2/0	6	8	4.75	.75	.56	.60	1 & 8	25

Copper

91152	Copper	#14 - #4	4	6	1.94	.44	.31	.312	1 & 6	100
91153	Copper	#14 - #4	5	7	2.25	.44	.31	.312	1 & 7	100
91154	Copper	#14 - #4	6	8	2.56	.44	.31	.312	1 & 8	100
91155	Copper	#14 - #4	12	14	4.43	.44	.31	.312	1 & 14	50
91156	Copper	#14 - #4	13	15	4.74	.44	.31	.312	3 & 13	50
91157	Copper	#14 - #4	13	15	4.74	.44	.31	.312	6 & 11	50
91158	Copper	#14 - #4	190	190	60.0	.44	.31	.312	-	10
91159	Copper	#14 - #2	3	5	2.00	.50	.38	.397	1 & 5	50
91160	Copper	#14 - #2	6	8	3.25	.50	.38	.397	2 & 7	50