

UltraThin Canopy LED Series




- ▶ Cree CXA LEDs
- ▶ Integral Cooling Fin Releases the Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Prismatic Polycarbonate Lens
- ▶ Superior Architectural Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ 4 Threaded Apertures - (1)Back, (3)Sides
- ▶ Photo control (not included) can be installed on fixture
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 83+
- ▶ Light Pattern: Up to 135° Beam Angle
- ▶ Operating Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Weight: 5.2 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ UL & cUL listed for Wet Locations
- ▶ 5 year Warranty

LED Lighting

CC13

Cat. No.	Watts	Housing Color	Color Temperature	Delivered Lumens	Replaces Metal Halide	Case Qty
71600	45	Bronze	4000K	4005	150W	1
71601	45	White	4000K	4005	150W	1
71602	45	Black	4000K	4005	150W	1
71603	45	Bronze	5000K	4149	150W	1
71604	45	White	5000K	4149	150W	1
71605	45	Black	5000K	4149	150W	1
71606	70	Bronze	4000K	5703	250W	1
71607	70	White	4000K	5703	250W	1
71608	70	Black	4000K	5703	250W	1
71609	70	Bronze	5000K	5928	250W	1
71610	70	White	5000K	5928	250W	1
71611	70	Black	5000K	5928	250W	1

Vandal Resistant Canopy LED Series

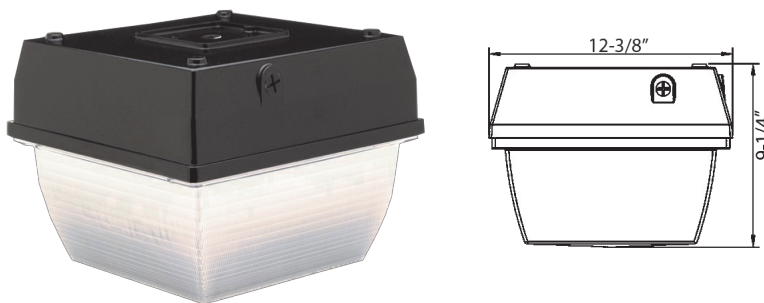

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Prismatic Polycarbonate Lens
- ▶ Superior Architectural Bronze Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Photo control (not included) can be installed on fixture
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Voltage: 120/277VAC
- ▶ 4 Threaded Apertures - (1)Top, (3)Sides
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 85
- ▶ Light Pattern: 129° Beam Angle
- ▶ Power Factor: .98
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Watts	Color Temperature	Delivered Lumens	Replaces Metal Halide	Weight (Lbs)	Case Qty
71462	40	5000K	3692	150W	16	1
71464	60	5000K	5702	200W	16	1
71466	80	5000K	6841	250W	16	1