


Linear Low Bay/High Bay LED Series



Low Bay - Frosted Lense
60 Watt

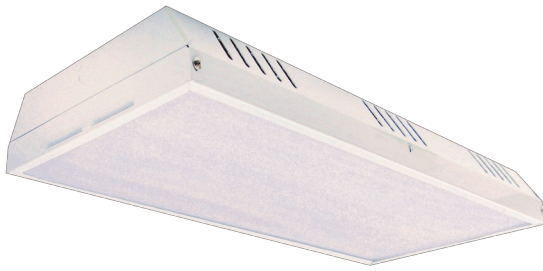


High Bay - Clear Lense
120 Watt & 180 Watt

- ▶ Ideal Replacement for Conventional HID & Fluorescent Lighting
- ▶ Applications Include Manufacturing, Warehousing & Other Large Indoor Spaces
- ▶ Fast, Easy Installation with Pluggable Disconnect
- ▶ Precision Engineered Aluminum Heat Sink Provides Maximum Natural Convective Cooling for Low Lumen Loss
- ▶ #71712 Modular Design Allows for Interconnection of 2X2 Fixtures-Stock and Install (2) 2X2 fixtures in lieu of (1) 2X4
- ▶ Model 71702 is not DLC Listed
- ▶ Models 71712 & 71722 are DLC Listed


- ▶ 120/277 Volt
- ▶ Efficacy: 125 LM/W
- ▶ CRI: >80
- ▶ Color Temperature: 5000K
- ▶ PF: >.95
- ▶ Current: 1.07A
- ▶ Operating Temperature: -22°F to +104°F
- ▶ Light Pattern: Horizontal: 115° Vertical: 89°
- ▶ Driver: TOWIN NI75W-66C1150 High PF
- ▶ LEDs: Edison 2835
- ▶ 50,000+ Hour Life Expectancy
- ▶ 5 Year Warranty

LED Lighting


CC16

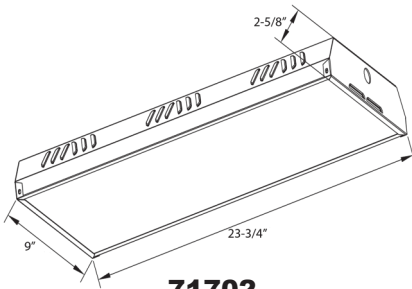

71702

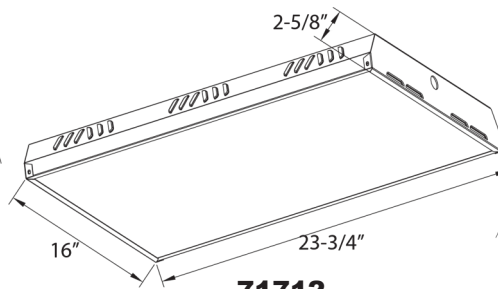


71712
Modular/linkable

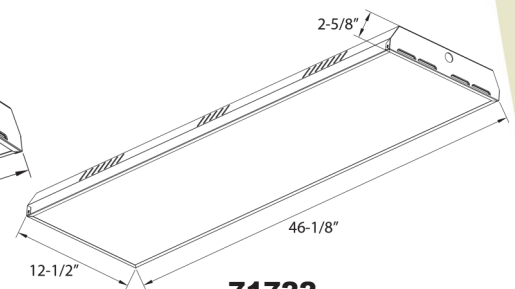


71722


Luminous Intensity Distribution Curve

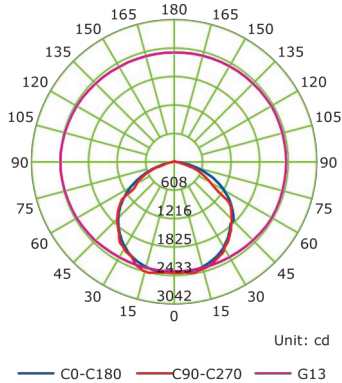

Luminous Intensity Distribution Curve

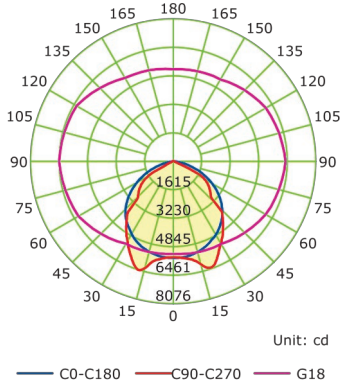

Luminous Intensity Distribution Curve

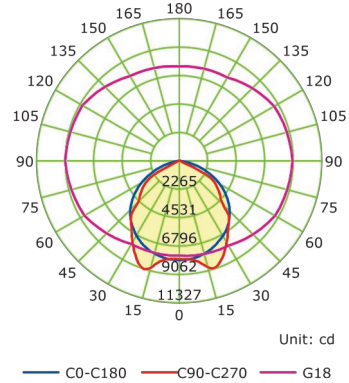

| Cat No. | Watts | Lumens | Replaces Metal Halide | Lens | Length | Width | Depth | Case Qty |
|------------------|-------|--------|-----------------------|---------|---------|---------|--------|----------|
| Low Bay | | | | | | | | |
| 71702 | 60 | 7,700 | 175W | Frosted | 23-3/4" | 9" | 2-5/8" | 1 |
| High Bays | | | | | | | | |
| 71712 | 120 | 15,198 | 400W | Clear | 23-3/4" | 16" | 2-5/8" | 1 |
| 71722 | 180 | 22,903 | 600W | Clear | 46-1/8" | 12-1/2" | 2-5/8" | 1 |