


## Entryway/Walkway Wallmount LED Series



- ▶ Cree CXA LEDs
- ▶ Dark Sky Compatible
- ▶ Includes Morris #39069 Photocell for 120V usage only
- ▶ Unit can be used for 120-240V if Photocell is disconnected
- ▶ Integral Cooling Fin Releases the Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Anti-Glare Polycarbonate Frosted Lens
- ▶ Superior Architectural Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Voltage: 120VAC
- ▶ CRI: 72+
- ▶ Light Pattern: 120° Beam Angle
- ▶ Operating Temperature: -22°F to 104°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Weight: 5 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

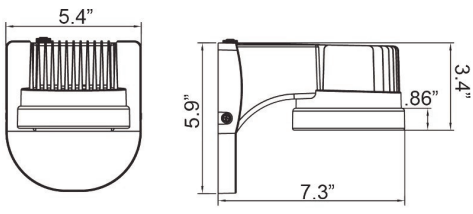

Cat. No.	Color	Watts	Color Temperature	Delivered Lumens	Replaces Metal Halide	Length	Width	Height	Case Qty
71299	Bronze	14	3000K Warm White	750	50W	7-1/4"	5-3/8"	5-7/8"	6
71300	Bronze	14	5000K Cool White	750	50W	7-1/4"	5-3/8"	5-7/8"	6
71301	White	14	3000K Warm White	750	50W	7-1/4"	5-3/8"	5-7/8"	6


**LED Lighting**

**CC18**

## Designer Wallpack LED Series



- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ TOWIN Driver
- ▶ Die Cast Aluminum Housing
- ▶ Bronze or White Powder Coat Finish
- ▶ Prismatic Polycarbonate Lens
- ▶ Die Cast Aluminum Mounting Plate
- ▶ Stainless Steel Hardware
- ▶ 3 Threaded Apertures - (1)Back, (2)Sides
- ▶ 1 Extra KO knockout on back
- ▶ Photo control (not included) can be installed on fixture
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 84
- ▶ Light Pattern: 180° Beam Angle
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ (3) 1/2" KOs at Base of Fixture
- ▶ Weight: 6.5 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ Photocell Not Included
- ▶ 5 Year Warranty

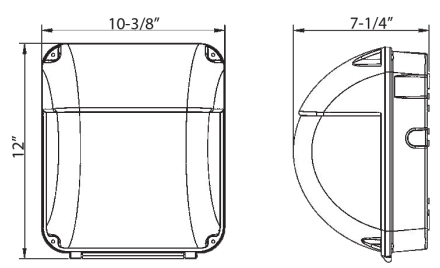

Cat. No.	Watts	Housing Color	Delivered Lumens	Replaces Metal Halide	Weight (Lbs)	Case Qty
71432	50	Bronze	4489	150W	6.5	1
71433	50	White	4489	150W	6.5	1