


**Heavy Duty Thick Wall Flame Retardant Thermoplastic shell provides excellent electrical insulation. Housing will not Stress/Fracture or Allow Conductors to Penetrate Housing Wall**

**Swept-Back wing design fits naturally into your fingers and provides finger-tip comfort Allowing for Increased Torque**

**No Pre-Twisting Necessary**

**Connector will Bite & Hold on Single Conductor to facilitate Isolation/Capping of Conductor**

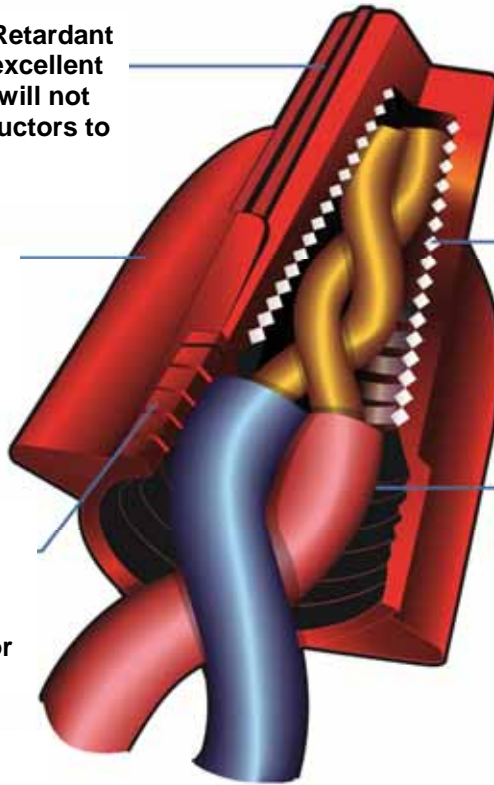


**Live Action Square Wire Spring Draws Wires Deep into Spring, Providing a more Secure Grip on Conductors & Finishing Termination in 1/2 the Time/Labor of Competitors' Products**

**Deep Skirt Entry Provides Protection from Flashover and Shorts**

- ▶ Color Coded for easy Wire Range Identification
- ▶ Swept wing fits into your hand naturally to give extra torque/leverage and reduce the effort required for splicing, working especially well for large wire combinations
- ▶ Compact, narrow profile takes up less space in junction boxes
- ▶ Ribbed-Cap provides more secure grip and faster fingertip starts even when hands become slippery
- ▶ Temperature rated at 221°F (105°C) maximum
- ▶ No Pre-Twisting of Conductors is required - spring creates its own thread
- ▶ Reusable connector threads on or off splice for fast and easy circuit changes and additions
- ▶ Tough, UL 94V-2 Flame Retardant Shell will not crack or break, even when applied to maximum wire combinations under extreme pressure
- ▶ Rated 600 Volt, 1000 Volt Max. in lighting fixtures & signs

## Grounding Connectors

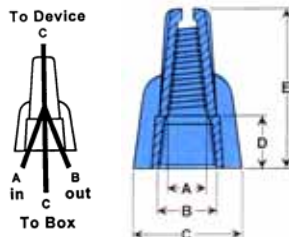

- ▶ Specifically designed for making Positive Ground Connections and Bonding Non-Metallic Sheathed Cable
- ▶ Color Coded Green for Identification as Grounding Connector
- ▶ Live Action Square Spring Draws Wires Deep into Spring for safe tight grip and a reliable connection
- ▶ Built-in Swept-Back Wing Design enables users to tighten connectors easily without tools

Dimensions = Inches

Cat. No.	Color	Wire Combinations	A	B	C	D	E	Qty	Case Qty
<b>Hanging Bag 25 Pack</b>									
23292	Green	No.14 Thru 10 Awg	.327	.476	.795	.370	1.134	25	5,000
<b>Boxed 100 Pack</b>									
23092	Green	No.14 Thru 10 Awg	.327	.476	.795	.370	1.134	100	10,000
<b>Bagged 500 Bulk Pack</b>									
23192	Green	No.14 Thru 10 Awg	.327	.476	.795	.370	1.134	500	5,000