



Heat Shrinkable - Ring Terminals

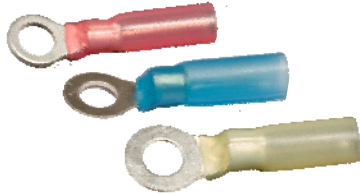

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: 14°F ~ 221°F(-10°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink



TERMINAL MATERIAL: Electro-Tin Plated Copper

FEATURES: Brazed Seam, Serrated Barrel

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	d2	W	L	Bag Qty	Master Bag Qty
12212	Red	22-16	#6	.217	.984	100	1000
12214	Red	22-16	#8	.315	1.122	100	1000
12216	Red	22-16	#10	.315	1.122	100	1000
12218	Red	22-16	1/4	.457	1.358	100	1000
12220	Red	22-16	5/16	.457	1.358	100	1000
12222	Red	22-16	3/8	.535	1.476	100	1000
12224	Blue	16-14	#6	.260	1.043	100	1000
12226	Blue	16-14	#8	.335	1.201	100	1000
12228	Blue	16-14	#10	.374	1.201	100	1000
12230	Blue	16-14	1/4	.472	1.398	100	1000
12232	Blue	16-14	5/16	.472	1.398	100	1000
12234	Blue	16-14	3/8	.535	1.476	100	1000
12236	Yellow	12-10	#8	.374	1.339	100	1000
12238	Yellow	12-10	#10	.472	1.476	100	1000
12240	Yellow	12-10	1/4	.591	1.654	100	1000
12242	Yellow	12-10	5/16	.591	1.654	100	1000
12244	Yellow	12-10	3/8	.756	1.831	100	1000
12246	Yellow	12-10	1/2	.756	1.831	100	1000
12250	Red	8	5/16	.591	1.693	100	-
12251	Red	8	3/8	.591	1.693	100	-

Heat Shrinkable - Spade Terminals

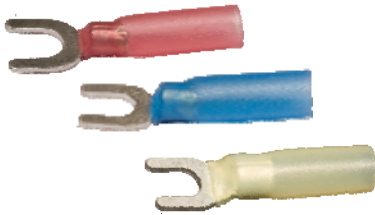

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: 14°F ~ 221°F(-10°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

TERMINAL MATERIAL: Electro-Tin Plated Copper

FEATURES: Serrated Barrel, Brazed Seam

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	d2	W	L	Bag Qty	Master Bag Qty
12252	Red	22-16	#6	.252	1.154	100	1000
12254	Red	22-16	#8	.283	1.165	100	1000
12256	Red	22-16	#10	.374	1.181	100	1000
12257	Blue	16-14	#4	.224	1.122	100	1000
12258	Blue	16-14	#6	.236	1.122	100	1000
12260	Blue	16-14	#8	.283	1.161	100	1000
12262	Blue	16-14	#10	.366	1.201	100	1000
12264	Yellow	12-10	#8	.354	1.319	100	1000
12266	Yellow	12-10	#10	.354	1.319	100	1000
12268	Yellow	12-10	1/4	.472	1.614	100	1000