


Heat Shrinkable - Female Disconnects

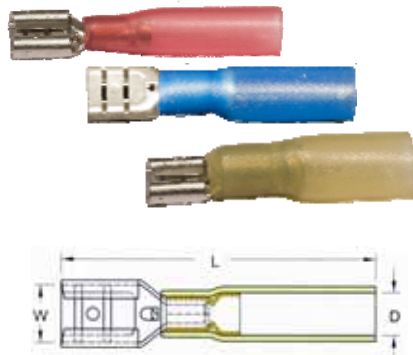

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: 14°F ~ 221°F(-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve


TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	NEMA TAB	W	D	L	Bag Qty	Master Bag Qty
12272	Red	22-16	.032 X.250	.260	.217	1.339	100	1000
12274	Blue	16-14	.032 X.250	.260	.236	1.339	100	1000
12276	Yellow	12-10	.032 X.250	.260	.319	1.378	100	1000

Heat Shrinkable - Fully Insulated Female Disconnects

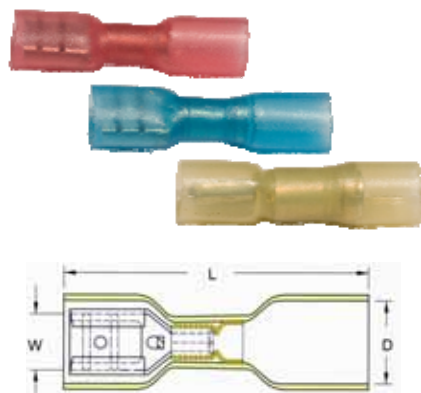

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: 14°F ~ 221°F(-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve


TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	NEMA TAB	W	D	L	Bag Qty	Box Qty
12282	Red	22-16	.032 X.250	.260	.256	1.102	100	1000
12284	Blue	16-14	.032 X.250	.260	.256	1.102	100	1000
12286	Yellow	12-10	.032 X.250	.260	.295	1.102	100	1000

Heat Shrinkable - Male Disconnects

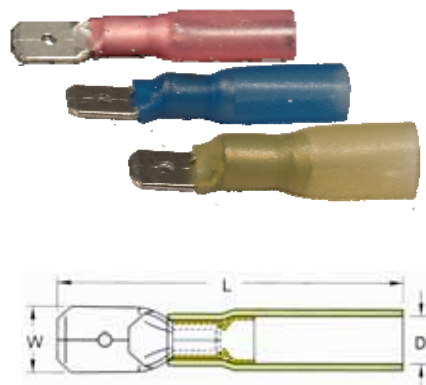

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: 14°F ~ 221°F(-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve

TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	NEMA TAB	W	D	L	Bag Qty	Master Bag Qty
12292	Red	22-16	.032 X.250	.250	.217	1.339	100	1000
12294	Blue	16-14	.032 X.250	.250	.236	1.339	100	1000
12296	Yellow	12-10	.032 X.250	.250	.319	1.378	100	1000