


Heat Shrinkable - Nylon Fully Insulated Male Disconnects

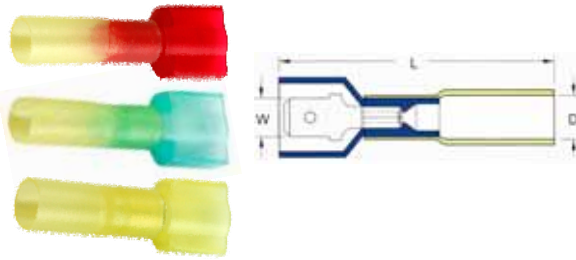

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: -40°F ~ 221°F (-40°C ~ 105°C)


INSULATION MATERIAL: Nylon & High Density PE Heat Shrink

TERMINAL MATERIAL: Electro-Tin Plated Tubular Copper

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	Tab Size	L	W	D	Bag Qty	Master Bag Qty
12277	Red	22-16	.032 x .250	1.516	.25	.256	100	1000
12278	Blue	16-14	.032 x .250	1.555	.25	.256	100	1000
12279	Yellow	12-10	.032 x .250	1.555	.26	.295	100	1000

Heat Shrinkable - Bullet Disconnects

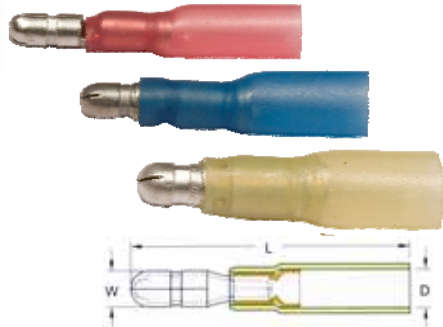

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: 14°F ~ 221°F(-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve


TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	W	D	L	Bag Qty	Box Qty
12312	Red	22-16	.157	.217	1.299	100	1000
12314	Blue	16-14	.157	.236	1.299	100	1000
12316	Blue	16-14	.197	.236	1.299	100	1000
12318	Yellow	12-10	.197	.319	1.398	100	1000

Heat Shrinkable - Nylon Fully Insulated Bullet Disconnects

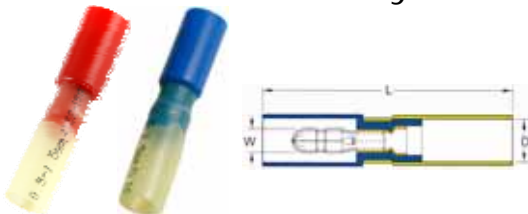

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14
Amp	3	4	7	10	15

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 221°F(105°C)


INSULATION MATERIAL: Nylon with High Density PE Heat Shrink

TERMINAL MATERIAL: Electro-Tin Plated Tubular Brass

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	Dia (W)	L	W	D	Bag Qty	Master Bag Qty
12319	Red	22-16	.157	1.654	.25	.256	100	1000
12320	Blue	16-14	.157	1.555	.25	.256	100	1000

Heat Shrinkable - Fully Insulated Receptacle Disconnects

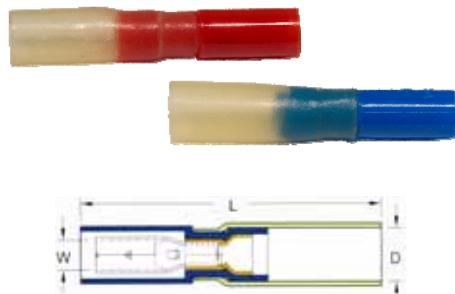

MAXIMUM ELECTRIC CURRENT:

Awg	22	20	18	16	14	12	10
Amp	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F(150°C)

RESISTANT TEMP: 14°F ~ 221°F(-26°C ~ 105°C)

INSULATION MATERIAL: Nylon with High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve

TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

Dimensions = Inches

Cat. No.	Color	Wire Size AWG	W	D	L	Bag Qty	Master Bag Qty
12322	Red	22-16	.154	.256	1.594	100	1000
12324	Blue	16-14	.154	.295	1.594	100	1000