


To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit

Dimensions = Inches

Cat. No	Trade Size	Dimensions-C Series				Box Qty
		A	B	C	D	
14120	1/2"	4.72	1.34	1.36	.61	50
14121	3/4"	5.51	1.56	1.63	.81	50
14122	1"	6.46	1.82	1.89	1.04	25
14123	1-1/4"	8.35	2.51	2.50	1.37	10
14124	1-1/2"	8.35	2.51	2.50	1.60	10
14125	2"	10.55	3.19	3.41	2.06	10
14126	2-1/2"	13.46	4.49	3.98	2.46	1
14127	3"	13.46	4.49	4.53	3.06	1
14128	3-1/2"	16.30	5.55	5.59	3.54	1
14129	4"	16.30	5.55	5.59	4.02	1
With Cover and Gasket						
14130	1/2"	4.72	1.34	1.36	.61	50
14131	3/4"	5.51	1.56	1.63	.81	50
14132	1"	6.46	1.82	1.89	1.04	25
14133	1-1/4"	8.35	2.51	2.50	1.37	10
14134	1-1/2"	8.35	2.51	2.50	1.60	10
14135	2"	10.55	3.19	3.41	2.06	10
14136	2-1/2"	13.46	4.49	3.98	2.46	1
14137	3"	13.46	4.49	4.53	3.06	1
14138	3-1/2"	16.30	5.55	5.59	3.54	1
14139	4"	16.30	5.55	5.59	4.02	1

- ▶ Tapered Threaded Hubs (NPT)
- ▶ RainTight when used with Gasketed Covers
- ▶ Die-Cast from High-Strength, Corrosion and Weather Resistant, Copper Free Aluminum Alloy
- ▶ Flat Back Design for easy mounting close to walls

Aluminum Mogul Bodies

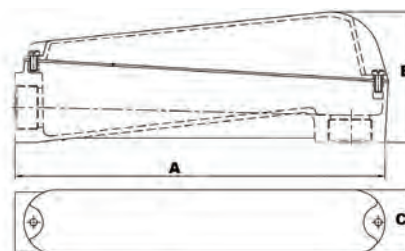

- ▶ Larger body size facilitates pulling of large and heavy conductors
- ▶ Specially designed raised cast covers provide additional wiring area
- ▶ Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices
- ▶ Exclusive built-in rollers facilitate cable pulling
- ▶ Smooth, rounded integral bushing in each hub protects conductor insulation
- ▶ Accurately tapped, tapered threads for tight, rigid joints and ground continuity
- ▶ Covers have captive stainless steel screws to speed installation, prevent 'freezing' of screws
- ▶ Includes cellulose/rubber Flex Sealing Gasket
- ▶ Length Requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit

With Cover & Gasket

Dimensions = Inches

Cat. No	Trade Size	Dimensions			Wire Size	Box Qty
		A	B	C		
14300	1-1/4"	9.65	3.54	2.50	3 #1/0 AWG	2
14301	1-1/2"	14.53	5.41	3.13	3 #3/0 AWG	1
14302	2"	14.53	5.41	3.13	3 #300 MCM	1
14303	2-1/2"	22.01	7.54	4.53	3 #400 MCM	1
14304	3"	22.01	7.54	4.53	3 #700 MCM	1
14305	3-1/2"	28.84	8.94	5.51	3 #900 MCM	1
14306	4"	28.84	8.94	5.51	3 #1000 MCM	1