


## Nylon Cable Glands - Metric Thread



- ▶ Seal & Clamp System allows the cord connector to tighten in a Circular Sequence on the sealing ring to give Superior Strain Relief without twisting or damaging the cable
- ▶ Simply push the cable through the liquid-tight nylon strain relief & tighten nut for quick installation
- ▶ Threads into your panel for clearance, locknut included
- ▶ Internal Ratchet with Self-Locking Feature protects against vibration
- ▶ 'Collet' Design Accommodates Various Size Cords, Cables, Tubing, etc.
- ▶ Nylon Body Material is resistant to most common chemicals & solvents
- ▶ For Best Results, Use the Minimum Size that accommodates your cable
- ▶ No Disassembly Required
- ▶ Made of UL approved NYLON 66, 94V-2 (Black)
- ▶ -22°F to 140°F Temperature Rating
- ▶ IP68 Rated Submersible & Dustproof
- ▶ Metric Thread - Does not have NPT threading
- ▶ UL Recognized - 22564-22568 UR Listed

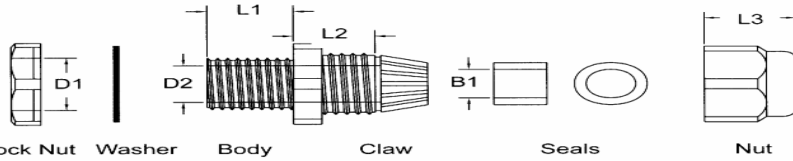

\*Sku's Not UL Recognized


Cat. No.	Mounting Hole (D1)	Cable Range	Thread Pitch (mm)	D2	B1	L1	L2	L3	Bag Qty	Master Bag Qty
22532*	.47"	.12-.26"	1.25	.33"	.24"	.31"	.48"	.52"	10	100
22534	.63"	.20-.39"	1.50	.43"	.38"	.62"	.57"	.66"	10	100
22536	.79"	.39-.55"	1.50	.58"	.51"	.59"	.78"	.72"	10	100
22538	.98"	.51-.71"	1.50	.73"	.65"	.59"	.74"	.88"	10	100
22540	1.26"	.71-.98"	1.50	1.02"	.92"	.58"	.80"	1.03"	10	100
22542	1.57"	.87-1.26"	1.50	1.30"	1.20"	.70"	.92"	1.24"	10	100
22544*	1.97"	1.18-1.50"	1.50	1.62"	1.50"	.68"	1.01"	1.24"	10	100
22546*	2.40"	1.34-1.73"	1.50	2.13"	1.73"	.73"	1.06"	1.28"	10	100
22548*	2.48"	1.65-1.97"	1.50	2.20"	1.95"	1.00"	1.16"	1.43"	10	100

Dimensions = Inches

## Nylon Cable Glands - Metric Thread (With Strain Relief)



- ▶ Extended Cord Support Strain Relief Feature
- ▶ Seal & Clamp System allows the cord connector to Tighten in a Circular Sequence on the sealing ring to give Superior Strain Relief without twisting or damaging the cable
- ▶ Simply push the cable through the liquid tight nylon strain relief & tighten nut for quick installation
- ▶ Threads into your panel for clearance, locknut included
- ▶ Internal Ratchet with Self-Locking Feature protects against vibration
- ▶ 'Collet' Design Accommodates Various Size Cords, Cables, Tubing, etc.
- ▶ Nylon body Material is resistant to most common chemicals & solvents
- ▶ For Best Results, Use the Minimum Size that fits into your cable
- ▶ No Disassembly Required
- ▶ Made of UL approved NYLON 66, 94V-2 (Black)
- ▶ -22°F to 140°F Temperature Rating
- ▶ IP68 Rated Submersible & Dustproof
- ▶ Metric Thread - Does not have NPT threading
- ▶ UL Recognized - 22564-22568 UR Listed

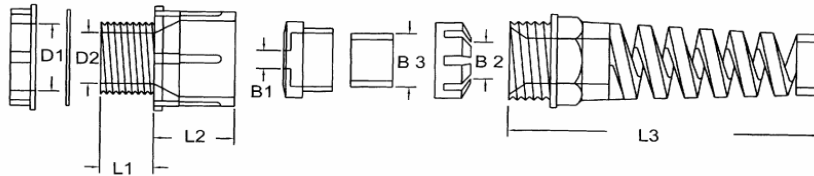

\*22562 Not UL Recognized

Cat. No.	Mounting Hole (D1)	Cable Range	Thread Pitch (mm)	D2	B1	L1	L2	L3	Bag Qty	Master Bag Qty
22562*	.47"	.12-.26"	1.25	.33"	.24"	.31"	.48"	.52"	10	100
22564	.63"	.20-.39"	1.50	.43"	.38"	.62"	.57"	.66"	10	100
22566	.79"	.39-.55"	1.50	.58"	.51"	.59"	.78"	.72"	10	100
22568	.98"	.51-.71"	1.50	.73"	.65"	.59"	.74"	.88"	10	100

Dimensions = Inches