



UB 2 port



UR & UR2 3 port



UY & UY2 2 port



UCC

- ▶ IDC connectors create fast splice and tap
- ▶ Corrosion resistant gel sealant protects connection
- ▶ Low voltage telecommunication cable applications
- ▶ Quick, easy one-step splicing
- ▶ Use with solid copper single-conductor wire
- ▶ UB 2 Wire Tap Splice - permits tapping onto conductors without service interruption
- ▶ UR 3 Wire Butt Splice - tap onto service lines in ready-access cases for pedestal mounts, pigtail joints or tap onto load coils such as toll cable splicing
- ▶ UY 2 Wire Butt Splice - designed for straight butt style splicing
- ▶ Complies with REA PE-52
- ▶ Complies with TIA/EIA 568-A Par 10.4.4 CAT-5 Std

Cat. No.	Type	Description	Color	Wire Range	Insulation Max O.D.	W	L	H	Bag Qty	Master Bag Qty
25 Pack										
10752	UB	2-Port Tap Splice	Blue	22-26	.050"	.346"	.492"	.24"	25	100
10754	UR	3-Port Butt Splice	Red	22-26	.066"	.492"	.768"	.23"	25	100
10755	UR2	3-Port Butt Splice	Red	19-26	.082"	.492"	.768"	.23"	25	100
10756	UY	2-Port Butt Splice	Yellow	22-26	.060"	.346"	.492"	.23"	25	100
10757	UY2	2-Port Butt Splice	Yellow	19-26	.082"	.346"	.492"	.23"	25	100
10760	UCC	2-Port Butt Splice	Red	22-26	.060"	.346"	.492"	.23"	25	100

100 Pack										
10762	UB	2-Port Tap Splice	Blue	22-26	.050"	.346"	.492"	.24"	100	1000
10764	UR	3-Port Butt Splice	Red	22-26	.066"	.492"	.768"	.23"	100	1000
10765	UR2	3-Port Butt Splice	Red	19-26	.082"	.492"	.768"	.23"	100	1000
10766	UY	2-Port Butt Splice	Yellow	22-26	.060"	.346"	.492"	.23"	100	1000
10767	UY2	2-Port Butt Splice	Yellow	19-26	.082"	.346"	.492"	.23"	100	1000
10770	UCC	2-Port Butt Splice	Red	22-26	.060"	.346"	.492"	.23"	100	1000

Phone Junction Box



- ▶ Split 1 Line Into 2 Separate Lines
- ▶ For 2 Phone Lines
- ▶ With Mounting Black
- ▶ 4 Conductor
- ▶ Ivory

Cat. No.	Bag Qty
40070	50


25-Pair 66 Block



Wiring Block



Cover

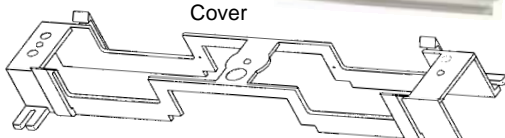

Mounting Bracket

- ▶ Hooked contacts for smooth wire placement
- ▶ Nickel plating gives secure connection
- ▶ Clear plastic cover fits over entire block, protects contacts & allows a clear view of all connections without removing cover
- ▶ High-Impact PVC construction
- ▶ 22-26 Awg Wire
- ▶ 10"L x 2"W x 1-1/4" H

Cat. No.	Description	Case Qty
40130	Wiring Block and Cover	10
40132	Mounting Bracket	-