



Catalog Number 11662
UPC Number 60198611662
Description Non-Insulated Locking Fork Spade Terminals
 22-16 AWG



Features


Manufactured from high strength copper alloy
 Electro-tin plated for corrosion resistance
 Wire range stamped on the surface for easy interpretation
 Brazed seam prevents splitting under maximum pressure
 Serrated barrel provides excellent electrical contact and pull-out resistance characteristics at barrel
 Locking tabs on Tang for increased pull-out force resistance

General

Insulation Type N/A
Material Copper
Finish Electro-tin plated
Color N/A
Wire Range 22-16 AWG
Stud Size #6

Dimension Information

L Inches (mm) 0.63
W Inches (mm) 0.252
D Inches (mm) 0.134
d1 Inches (mm) 0.067
d2 Inches (mm) 0.146
E Inches (mm) 0.189
F Inches (mm) 0.256
T Inches (mm) 0.03



Specifications

Temperature Rating 150°C
Voltage Rating 600 V
Flammability Rating N/A
Amp Rating

22 AWG	9 Amps
20 AWG	12 Amps
18 AWG	17 Amps
16 AWG	18 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications



UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△	RDK-97127	2008/07/23
△	RDK-98020	2009/08/28

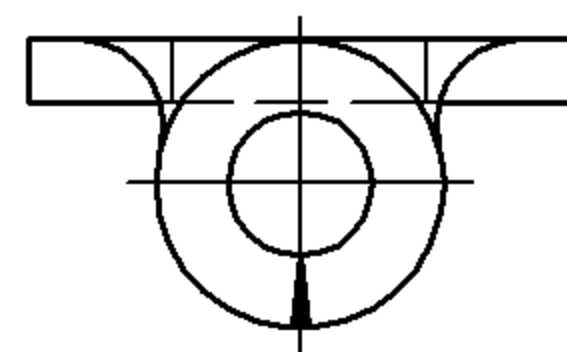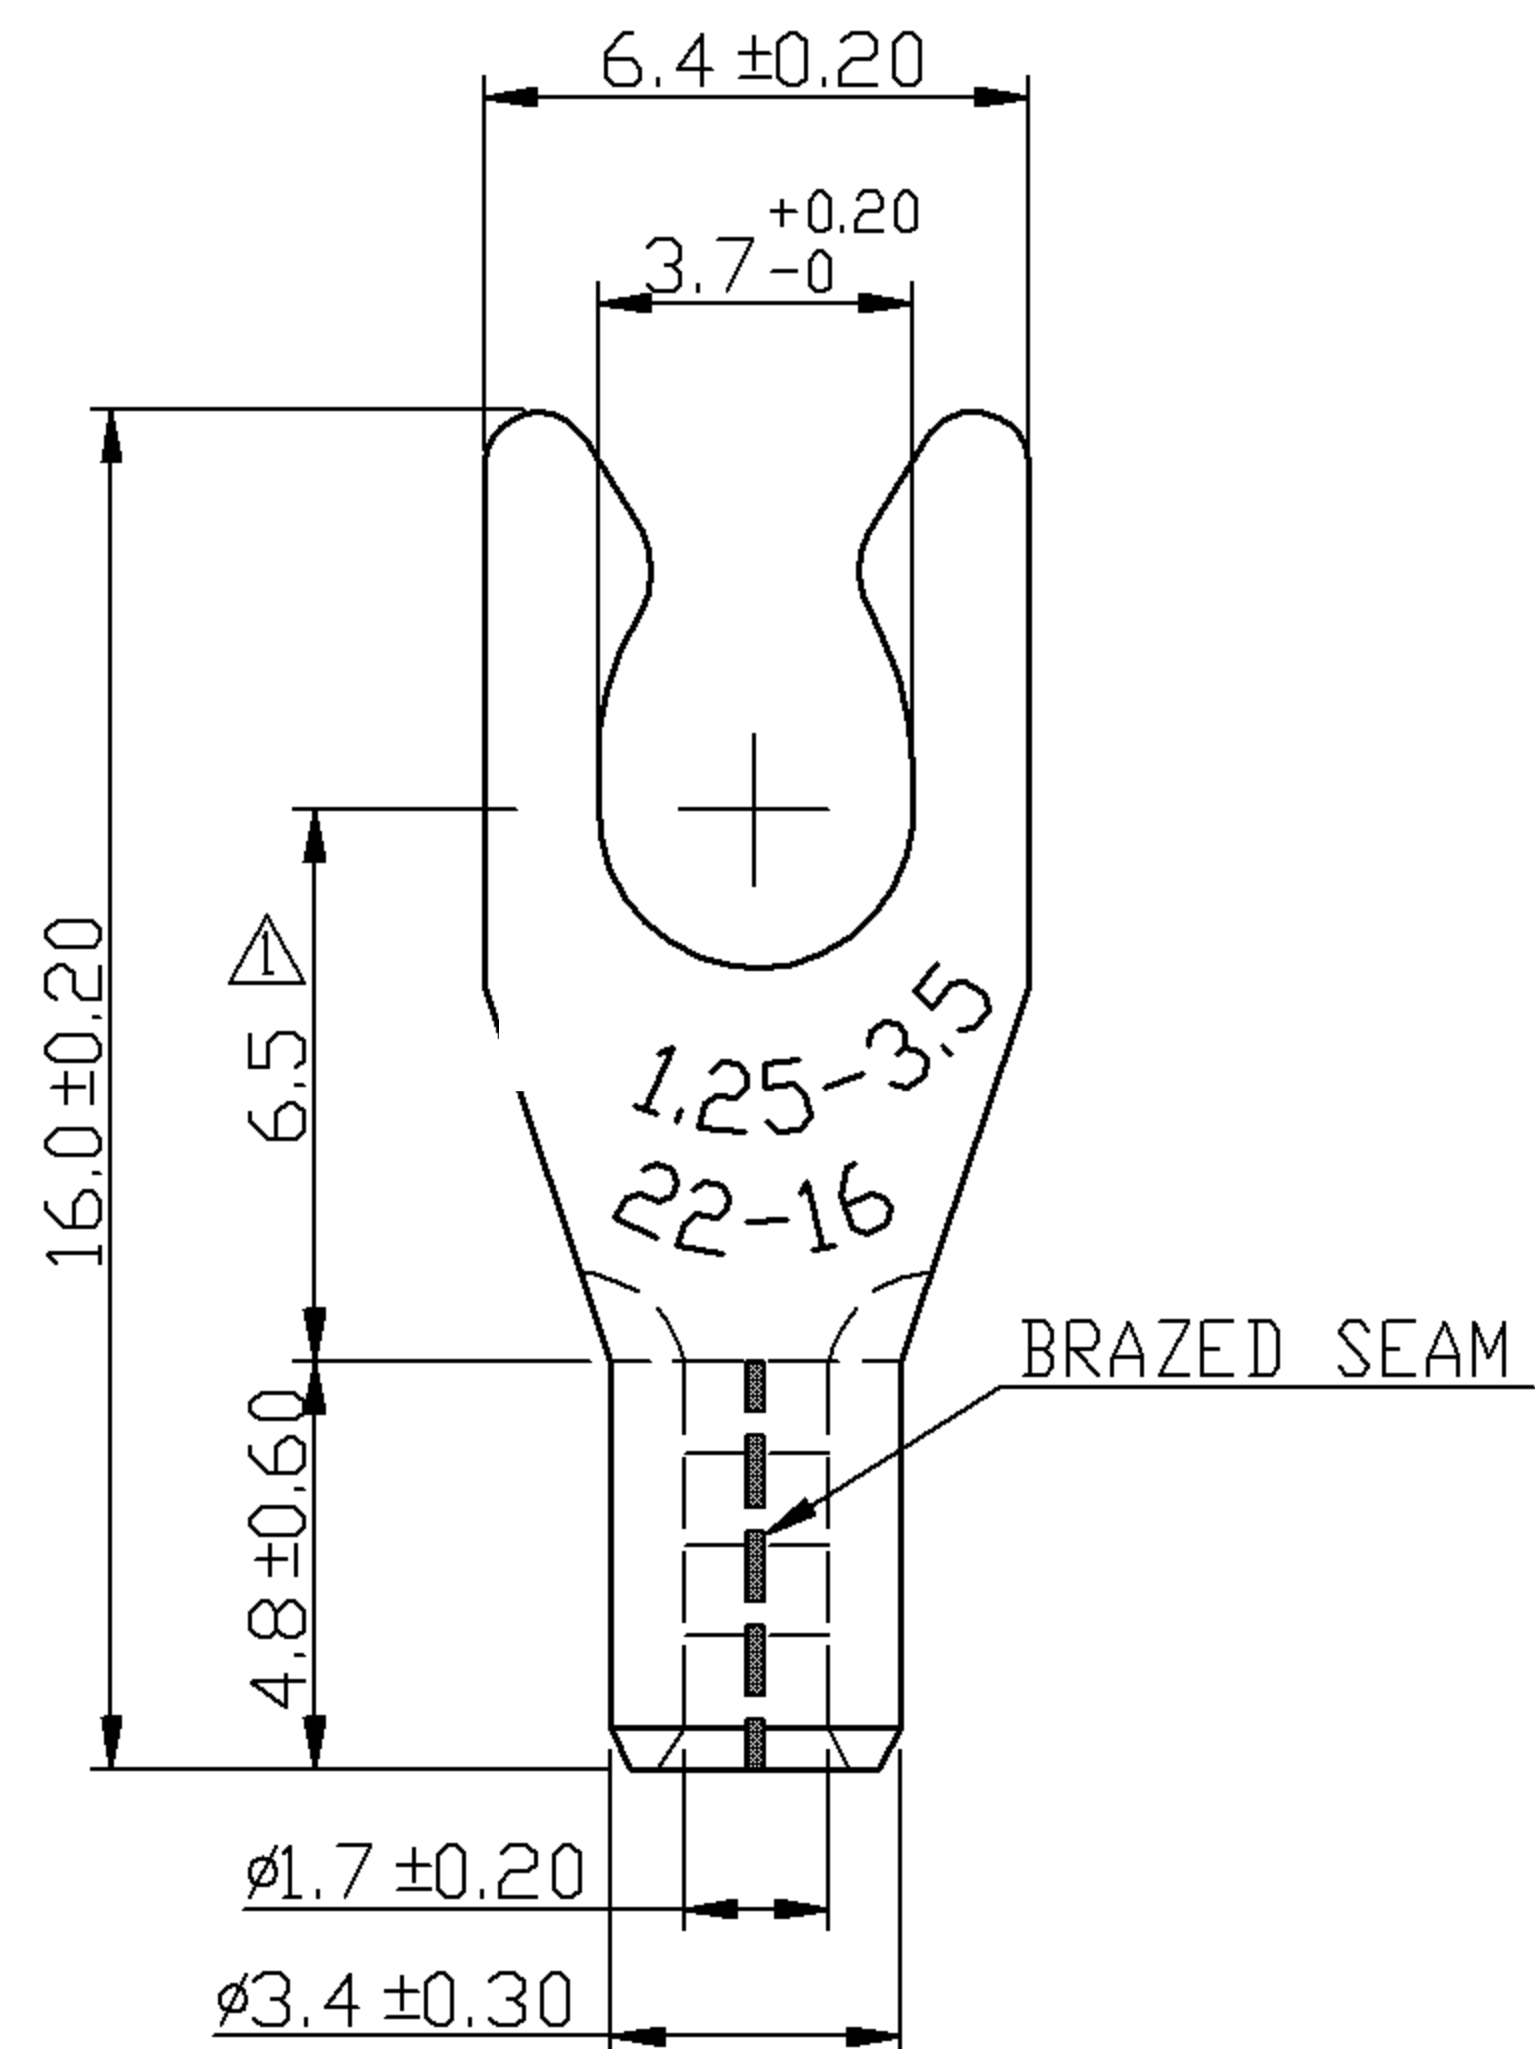

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
2. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 0.75 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	NON-INSULATED LOCKING SPADE TERMINALS			UNIT	mm	
PART NO.	11662	MATERIAL	COPPER	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/04/10	4/1	1-2	10F2	DRAWN	

Morris Products Inc.
53 Carey Rd Queensbury, NY 12804