



Catalog Number	11664
UPC Number	60198611664
Description	Non-Insulated Locking Fork Spade Terminals 22-16 AWG



Features


Manufactured from high strength copper alloy
 Electro-tin plated for corrosion resistance
 Wire range stamped on the surface for easy interpretation
 Brazed seam prevents splitting under maximum pressure
 Serrated barrel provides excellent electrical contact and pull-out resistance characteristics at barrel
 Locking tabs on Tang for increased pull-out force resistance

General

Insulation Type	N/A
Material	Copper
Finish	Electro-tin plated
Color	N/A
Wire Range	22-16 AWG
Stud Size	#8

Dimension Information

L Inches (mm)	0.63
W Inches (mm)	0.319
D Inches (mm)	0.134
d1 Inches (mm)	0.067
d2 Inches (mm)	0.169
E Inches (mm)	0.189
F Inches (mm)	0.256
T Inches (mm)	0.03



Specifications

Temperature Rating	150°C	
Voltage Rating	600 V	
Flammability Rating	N/A	
Amp Rating	22 AWG	9 Amps
	20 AWG	12 Amps
	18 AWG	17 Amps
	16 AWG	18 Amps

Packaging

Bag Qty	100
Master Bag Qty	1000

Certifications


UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△	RDK-97127	2008/07/23
△	RDK-98020	2009/08/28

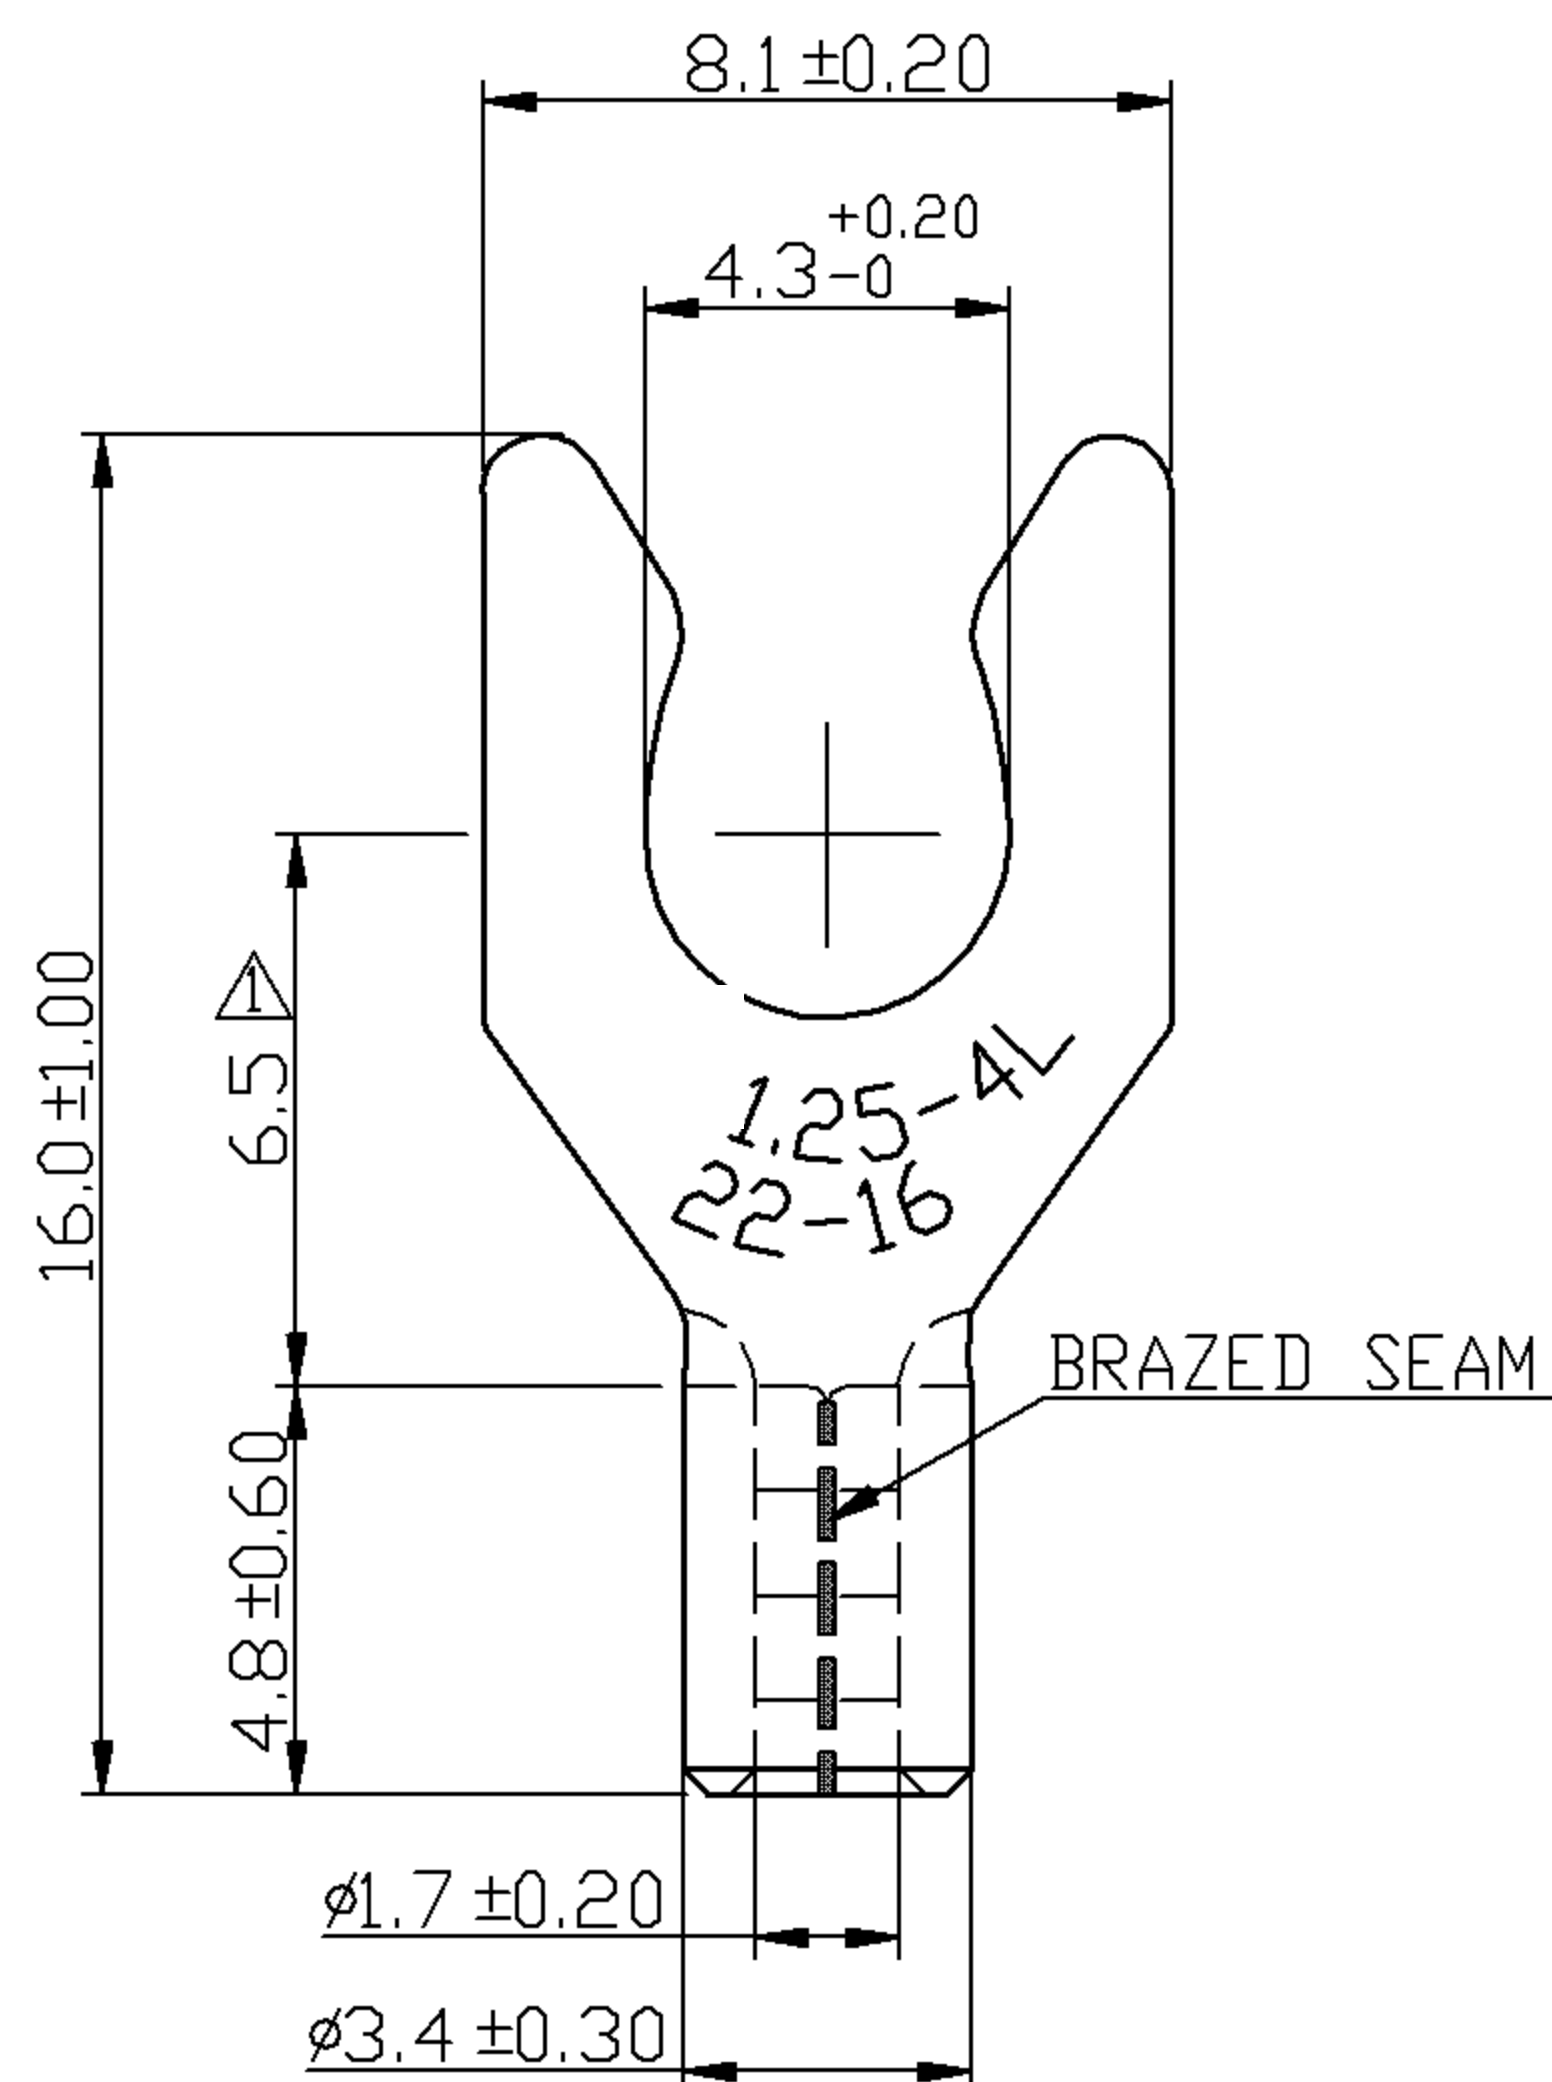

NOTE :

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
- WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
- SURFACE TREATMENT : TIN PLATED
- THICKNESS : 0.75 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	NON-INSULATED LOCKING SPADE TERMINALS			UNIT	mm	
PART NO.	11664	MATERIAL	COPPER	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/04/10	4/1	1-2	10F2	DRAWN	

Morris Products Inc.
53 carey rd. Queensbury, NY 12804