



Catalog Number 11904
UPC Number 60198611904
Description Nylon Insulated Female Disconnect Connectors
 22-16 AWG




Features

- Nylon Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Expanded insulation eliminates strand “Hang Up”, provides strain relief & excellent UV, temperature and chemical resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seams prevent splitting under maximum pressure
- Serrated barrel provides excellent electrical contact & pull-out force resistance

General

Insulation Type Nylon
 Material Brass
 Finish Electro-Tin Plated
 Color Red
 Wire Range 22-16
 Tab Size .032 X .110



Dimension Information

Stock Thickness 0.012
 L Inches (mm) 0.772
 B Inches (mm) 0.433
 C Inches (mm) 0.067
 D Inches (mm) 0.157
 F Inches (mm) 0.256
 W Inches (mm) 0.126

Specifications

Temperature Rating 105°C
 Voltage Rating 300 V
 Flammability Rating UL94V-O
 Amp Rating 22 AWG 9 Amps
 20 AWG 12 Amps
 18 AWG 17 Amps
 16 AWG 18 Amps

Packaging


Bag Qty 100
 Master Bag Qty 1000

Certifications

UL Yes
 cUL Yes
 RoHS Yes



REV	DESCRIPTION	DATE
-----	-------------	------

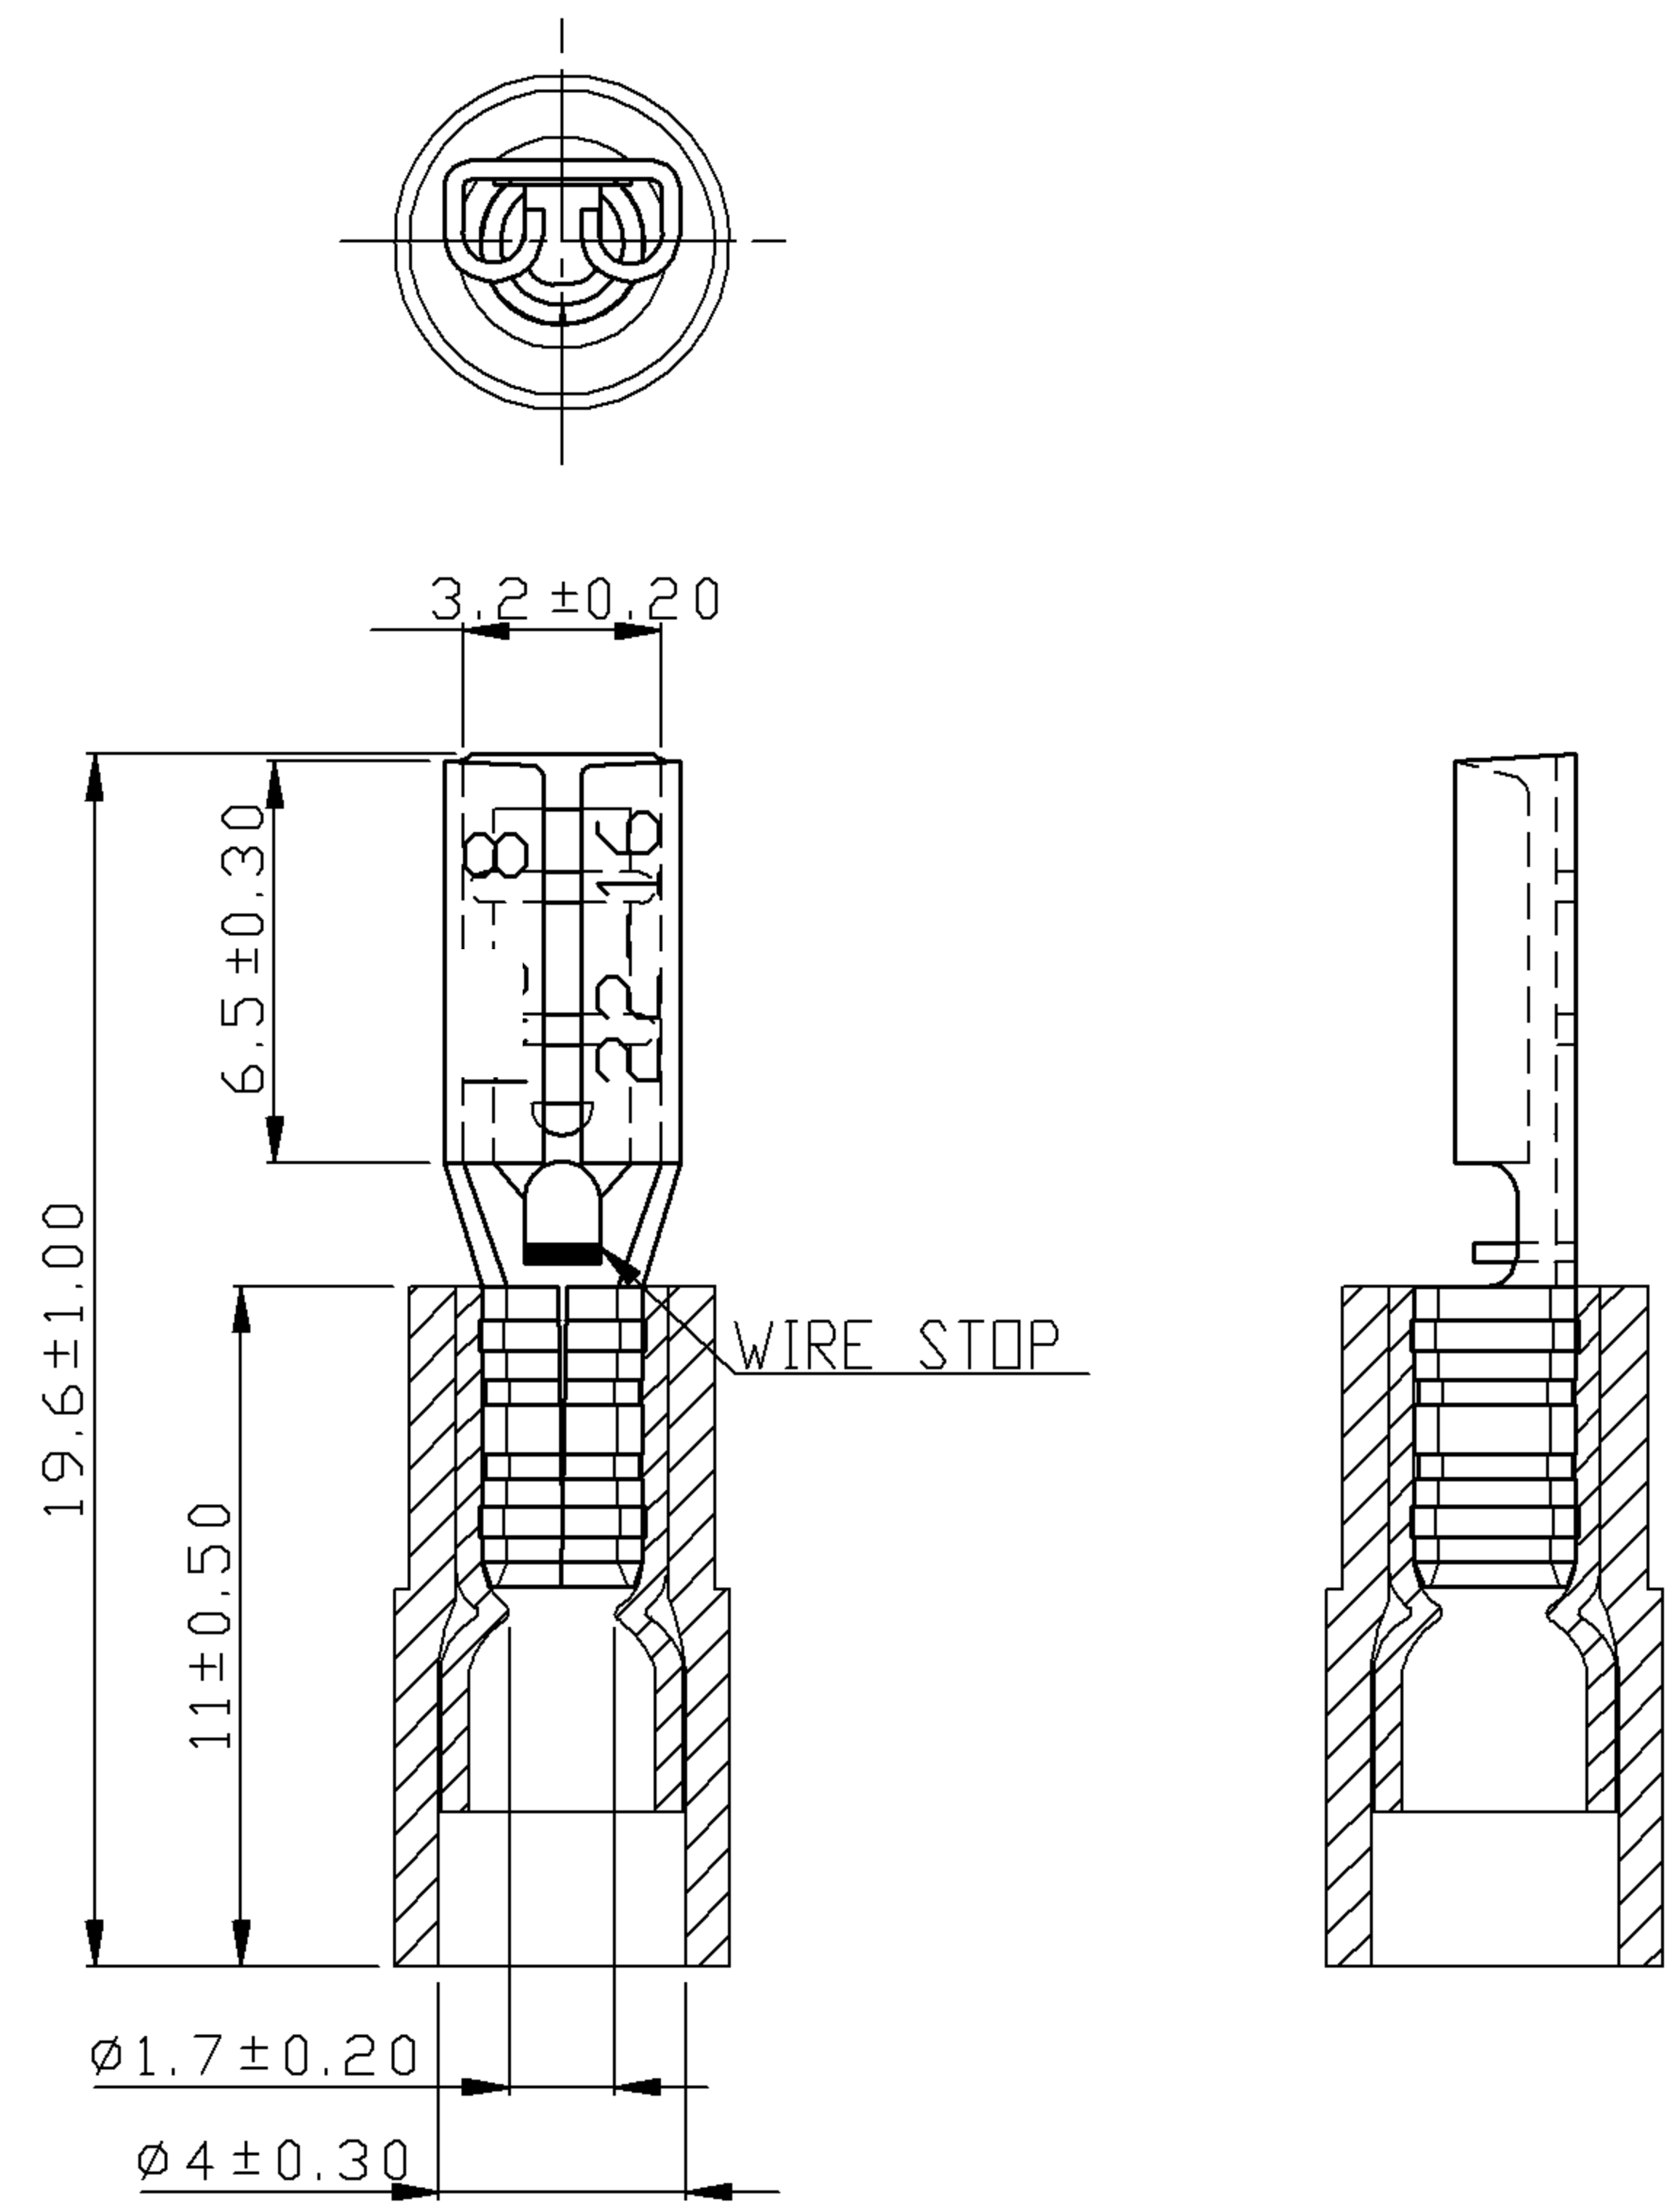

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	3	4	7	10
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : NYLON
 4. INSULATION COLOR : RED
 5. TERMINAL MATERIAL : BRASS
 6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
 7. NEMA TAB : 0.032 inch * 0.110 inch (0.8 mm * 2.80 mm)
 8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
 9. TERMINAL SURFACE TREATMENT : TIN PLATED
 10. TERMINAL THICKNESS : 0.30 mm

Tolerance Unless Otherwise Specified		
0 > 6 mm	± 0.20	ANGLE
6 > 18 mm	± 0.30	0° > ° REF ±
18 > 30 mm	± 0.40	° > ° ±
30 > 75 mm	± 0.50	° > ° ±

NAME	NYLON-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS			UNIT	
PART NO.	11904	MATERIAL	-----	APPROVE	
NUMBER	SCALE	SHEET	PAGE	CHECKED
DATE	2006/09/06	4/1	1-0	10F2	DRAWN

Morris Products Inc.