



**Catalog Number** 12106  
**UPC Number** 60198612106  
**Description** Non-Insulated Butt Splice Connector  
16-14 AWG



#### Features


- Manufactured from high strength tubular copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Funneled barrel provides excellent contact & mechanical pull-out force resistance

#### General

Insulation Type N/A  
Material Copper Tubular  
Finish Electro-Tin Plated  
Color N/A  
Wire Range 16-14  
Stud Size N/A

#### Dimension Information

L Inches (mm) 0.591  
D Inches (mm) 0.154  
D1 Inches (mm) 0.091  
T Inches (mm) 0.031



BUTT

#### Specifications

Temperature Rating 150°C  
Voltage Rating 600 V  
Flammability Rating N/A  
Amp Rating 14 AWG 30 Amps  
16 AWG 18 Amps

#### Packaging

Bag Qty 100  
Master Bag Qty 1000

#### Certifications


UL Yes  
cUL Yes  
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

[www.morrisproducts.com](http://www.morrisproducts.com)




REV	DESCRIPTION	DATE
-----	-------------	------

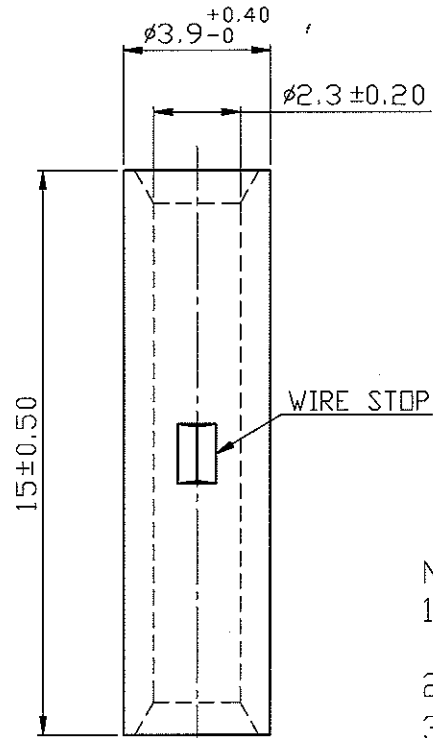

NOTE :

- MAXIMUM ELECTRIC CURRENT : 

A.W.G.	16	14	
AMP.	18	30	
- WIRE RANGE : 16-14 A.W.G. ( 1.5-2.5 mm<sup>2</sup> )
- SURFACE TREATMENT : TIN PLATED
- THICKNESS : 0.80 mm



Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	±

NAME	NON-INSULATED BUTT CONNECTORS				UNIT
PART NO.	12106	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-92034-C	SCALE	SHEET PAGE	CHECKED	
DATE	2006/03/17	5/1	1-0 10F1	DRAWN	

Morris Products Inc.