



**Catalog Number** 12114  
**UPC Number** 60198612114  
**Description** Non-Insulated Butt Splice Connector  
4 AWG



#### Features

- Manufactured from high strength tubular copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Funneled barrel provides excellent contact & mechanical pull-out force resistance

#### General

Insulation Type N/A  
Material Copper Tubular  
Finish Electro-Tin Plated  
Color N/A  
Wire Range 4  
Stud Size N/A

#### Dimension Information

L Inches (mm) 1.142  
D Inches (mm) 0.445  
D1 Inches (mm) 0.307  
T Inches (mm) 0.069

#### Specifications


Temperature Rating 150°C  
Voltage Rating 600 V  
Flammability Rating N/A  
Amp Rating 4 AWG 125 Amps

#### Packaging

Bag Qty 100  
Master Bag Qty 1000

#### Certifications

UL Yes  
cUL Yes  
RoHS Yes





BUTT

Morris Products 53 Carey Road, Queensbury, NY 12804

[www.morrisproducts.com](http://www.morrisproducts.com)



REV	DESCRIPTION	DATE
-----	-------------	------

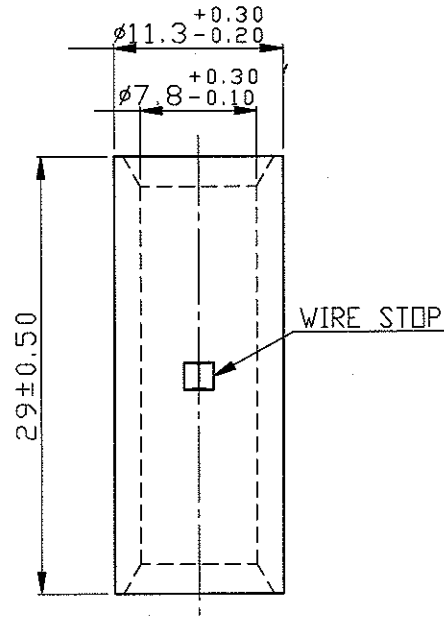


Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° ° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

- NOTE :
1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	4		
AMP.	125		
  2. WIRE RANGE : 4 A.W.G. ( 22 mm<sup>2</sup> )
  3. SURFACE TREATMENT : TIN PLATED
  4. THICKNESS : 1.75 mm

NAME	NON-INSULATED BUTT CONNECTORS				UNIT
PART NO.	12114	MATERIAL	COPPER TUBULAR	APPROVED	
NUMBER	KT-92045-C	SCALE	SHEET	PAGE	CHECKED
DATE	2006/03/17	2/1	1-0	10F1	DRAWN



Morris Products Inc.