




**Catalog Number** 12128  
**UPC Number** 60198612128  
**Description** Vinyl Insulated Butt Splice Connector  
8 AWG



#### Features

- Color Coded insulation for easy identification
- Manufactured from high strength tubular copper alloy
- Electro-tin plated for corrosion resistance
- Easy entry expanded insulation eliminates strand “Hang Up”, increases the crimping rates and the reliability of the termination
- Wire range stamped on the surface for easy interpretation
- Funneled barrel & flared insulation sleeve provides excellent contact & mechanical stress relief at insulation & barrel junction

#### General

Insulation Type Vinyl  
Material Tubular Copper  
Finish Electro-Tin Plated  
Color Red  
Wire Range 8  
Stud Size N/A

#### Dimension Information

L Inches (mm) 1.398  
D Inches (mm) 0.335  
D1 Inches (mm) 0.181

#### Specifications

Temperature Rating 75°C  
Voltage Rating 600 V  
Flammability Rating UL94V-O  
Amp Rating 8 AWG 70 Amps

#### Packaging

Bag Qty 100  
Master Bag Qty 1000


#### Certifications

UL Yes  
cUL Yes  
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804  
[www.morrisproducts.com](http://www.morrisproducts.com)



REV	DESCRIPTION	DATE
-----	-------------	------

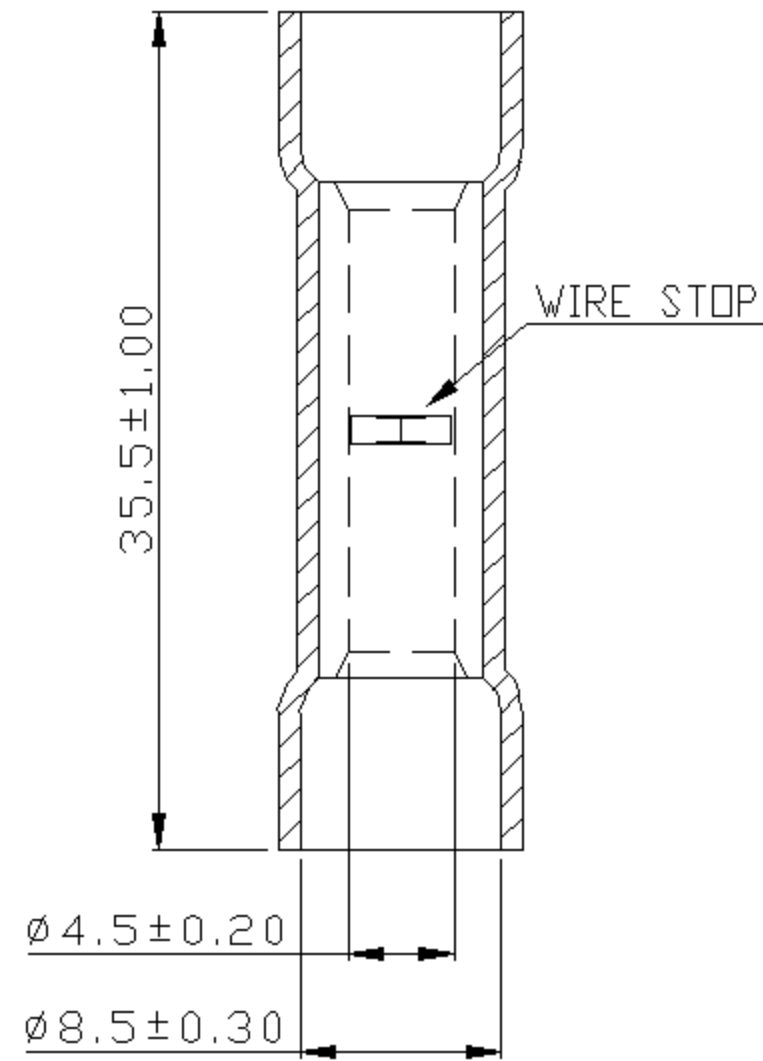

NOTE:

1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	8		
AMP.	70		
2. MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : RED
5. CONNECTOR MATERIAL : COPPER TUBULAR
6. WIRE RANGE : 8 A.W.G.( 8 mm<sup>2</sup>)
7. TERMINALS SURFACE TREATMENT : TIN PLATED

Tolerance Unless Otherwise Specified			
0 > 6	mm ± 0.20	ANGLE	
6 > 18	mm ± 0.30	0° >	° REF ±
18 > 30	mm ± 0.40	° >	° ±
30 > 75	mm ± 0.50	° >	° ±

NAME	VINYL-INSULATED BUTT SPLICE CONNECTORS			UNIT	mm	
PART NO.	12128	MATERIAL	-----	APPROVE		
NUMBER	KA-95826-C	SCALE	SHEET	PAGE	CHECKED	
DATE	2006/07/14	2/1	1-0	10F1	DRAWN	

Morris Products Inc.