



72332 - LED BOLLARD DOME TOP

120-277V 3K/4K/5K 12W/16W/22W
ROUND BLACK





FEATURES:

- Round Dome Top Only. Base sold separately Cat# 72330
- Color Selectable: 3000K/4000K/5000K
- Wattage Selectable: 12W/16W/22W
- Samsung 2835 LEDs
- 120-277V
- Housing Color: Black
- Corrosion Resistant Die-Cast Aluminum Housing
- Operating Temperature: -40°F to 122°F
- IP65 Rated
- DLC Listed

Part#	CCT	Lumens	Voltage	Beam Angle	Wattage	Lumens/Watt
72332	5000K	3,121	120-277V	60°	12/16/22W	142lm/w @22W
	4000K	2,923				133lm/w @22W
	3000K	2,841				129lm/w @22W

PHOTOMETRY

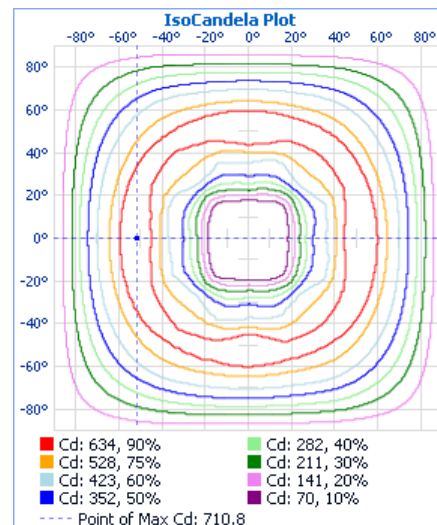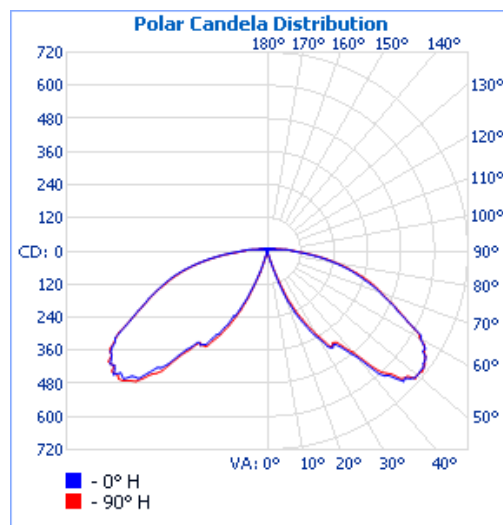



72332 - LED BOLLARD DOME TOP

120-277V 3K/4K/5K 12W/16W/22W
ROUND BLACK

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .15A@120V

Frequency: 50/60Hz

Power Factor: $\geq .98$

THD: $>20\%$

Product Parameters:

Input Watts: 12W/16W/22W

Lumens: 2,923

Efficacy: 133 lumens per watt

30,000+ Hour L70 Life Span

CCT: 3K/4K/5K

Chromaticity Measurements:

Beam Angle: 60°

CRI: >80

R9: 14

Component Specifications:

LED: SMD 2835

120-277V, 50-60Hz

Dimming: N/A

Operating Temperature:

Minimum Starting: $-40^\circ\text{F} \sim 122^\circ\text{F}$

Construction:

Housing: Corrosion Resistant Aluminum

Alloy Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Polycarbonate

Mounting: Outdoor

Listings:

DLC Product ID#: S-TA3Z2K

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

BOLT PATTERN:

