




72641 - 4" NEW CONSTRUCTION DOWNLIGHT

BAFFLE TRIM 10W 4000K

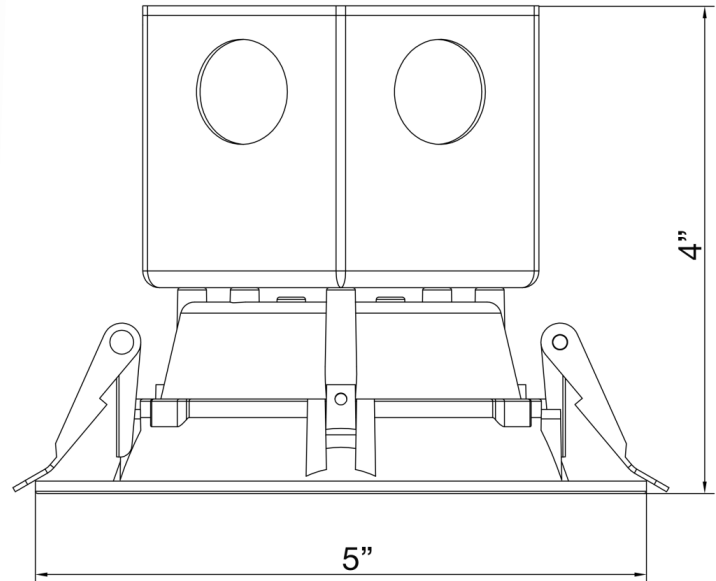

FEATURES:

- Includes 4" Square Junction Box
- Baffle Trim
- IP44 Damp Location Rated
- IC (Insulation Contact) Rated
- PC Housing & Trim
- Triac Dimming - Dimmable @ 120V Only-Down to 10%
- Torsion Spring Brackets for Mounting to Sheetrock
- Perfect for residential or commercial applications
- 5 Year Warranty
- Operating Temperature: -31°F to 122°F

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/ Watt	Energy Star
72641	White	10W	780	4000K	120-277	.079A	78	Yes



72641 - 4" NEW CONSTRUCTION DOWNLIGHT

BAFFLE TRIM 10W 4000K

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .079A @ 120V

Frequency: 60Hz

Power Factor: $\geq .9$

Product Parameters:

10 Watts

Efficacy: 78 lumens per watt

50,000+ LED Life Span

CCT: 4000k (Neutral White)

Chromaticity Measurements:

Beam Angle: 94°

BUG Rating: N/A

CRI: ≥ 92.6

R9: 52

DUV: 0.00063

Chromaticity (x,y): x=.3801; y= .3779

Chromaticity (u,v): u=.2244; v= .2314

Component Specifications:

LED: SMD2835

Driver: 120-277V 50-60HZ

Driver Output Volts:

Driver Output Amps:

Surge Protection:

Dimming: Triac Dimmable

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing/Trim

White Finish

IP Rating: IP44 Wet Indoor Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: ETL

Energy Star

Carton Qty: 12

Weight: 1.4 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).