




73426 - SQUARE HEAD EMERGENCY LIGHT

WHITE HOUSING, HIGH OUTPUT, REMOTE CAPABLE

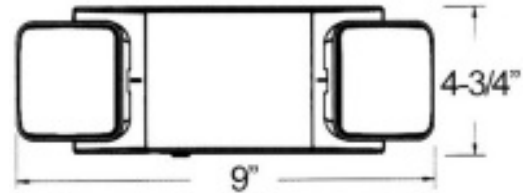

FEATURES:

- Long Life Energy Saving LED Lamps
- Completely Self-Contained
- Fully Automatic Operation
- Push to Test Switch
- Automatic Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 4 Watts for Red letters
- Injection-Molded, UL 94 V-O Flame Retardant, High Impact, Thermoplastic Housing
- Fully Adjustable Glare-Free LED Lamps
- Heads Rotate 180°+ for Maximum Field Flexibility
- Universal Mounting Canopy for Top or Back J-box Installation & 2 Snap-fit Face Plates
- Field replaceable chevron directional indicators
- Integral wiring channels to facilitate installation
- 3.6 Volt 1800 mAh Sealed Ni-Cad Rechargeable Maintenance-Free Battery
- 90 Minute Minimum Battery run Time
- Input Current: .22A 120V .10A 277V
- Input Wattage: 2.5W Remote Capable
- Environmentally-Coated, Solid State Charger
- Damp Location Rated
- UL 924 Listed, 3 Year Warranty

Part#	Type	Volts	Heads	Housing Color	Watts	Lumens Per Head
73426	High Output, Remote	120/277	2	White	2.5	76

Dimension Information

L Inches 9"
H Inches 4-3/4"

Specifications

Input Rating Amps: .22A@120V .10A@277V
Input Rating Watts: 2.5W
Frequency: 60 Hz
Voltage Rating: 120/277
Flammability Rating: UL94V-0

Packaging

Box Qty 1
Master Carton Qty 6

Certifications

UL UL 924
cUL Yes
RoHS Yes

TECHNICAL SPECIFICATIONS

Remote Capable - Accommodates up to 2 Additional LED Remote Lamp Heads
2 Heads - 3 Hours of Operation (Base Unit)
3 Heads - 2 Hours of Operation (Base Unit + 1 Remote Head)
4 Heads - 1.5 Hours of Operation (Base Unit + 2 Remote Heads)