



Catalog Number 12112
UPC Number 60198612112
Description Non-Insulated Butt Splice Connector
6 AWG



Features

- Manufactured from high strength tubular copper alloy
- Electro-tin plated for corrosion resistance
- Wire range stamped on the surface for easy interpretation
- Funneled barrel provides excellent contact & mechanical pull-out force resistance

General

Insulation Type N/A
Material Copper Tubular
Finish Electro-Tin Plated
Color N/A
Wire Range 6
Stud Size N/A

Dimension Information

L Inches (mm) 1.024
D Inches (mm) 0.35
D1 Inches (mm) 0.232
T Inches (mm) 0.059

Specifications


Temperature Rating 150°C
Voltage Rating 600 V
Flammability Rating N/A
Amp Rating 6 AWG 95 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes





BUTT

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
-----	-------------	------

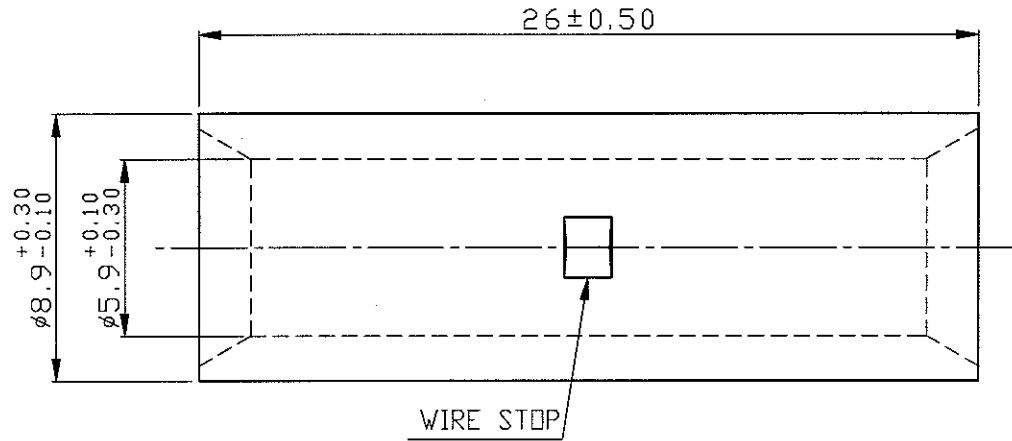

Tolerance Unless Otherwise Specified	
0 > 6 mm ±0.20	ANGLE
6 > 18 mm ±0.30	0° > ° REF ±
18 > 30 mm ±0.40	° > ° ±
30 > 75 mm ±0.50	±

- NOTE :
- MAXIMUM ELECTRIC CURRENT :

A.W.G.	6		
AMP.	95		
 - WIRE RANGE : 6 A.W.G. (14 mm²)
 - SURFACE TREATMENT : TIN PLATED
 - THICKNESS : 1.50 mm

NAME	NON-INSULATED BUTT CONNECTORS				UNIT
PART NO.	12112	MATERIAL	COPPER TUBULAR	APPROVE	
NUMBER	KT-92043-C	SCALE	SHEET	PAGE	CHECKED
DATE	2006/03/17	4/1	1-0	10F1	DRAWN

Morris Products Inc.