



Catalog Number 12274
UPC Number 60198612274
Description Heat Shrinkable Female Disconnect
16-14 AWG



Features


Color Coded HD Polyethylene Heat Shrink insulation
Manufactured from high strength copper alloy
Electro-tin plated for corrosion resistance
Expanded Insulation funnel entry eliminates strand “Hang Up”,
increases the crimping rates and the reliability of the termination
Wire range stamped on the surface for easy interpretation
Brazed seam prevent splitting under maximum pressure
Serrated barrel & extended copper crimp sleeve provide excellent
electrical contact, pull-out resistance & mechanical stress relief

General

Insulation Type High Density Polyethylene Heat Shrink
Material Copper
Finish Electro-tin plated
Color Blue
Wire Range 16-14 AWG
Tab Size .032 X .250

Dimension Information

L Inches (mm) 1.339
W Inches (mm) 0.26
D Inches (mm) 0.236



Specifications

Temperature Rating 105°C
Voltage Rating 300 V
Flammability Rating UL94V-O
Amp Rating 14 AWG 15 Amps
16 AWG 10 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications


UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
△ RDK-97140		2008/07/15

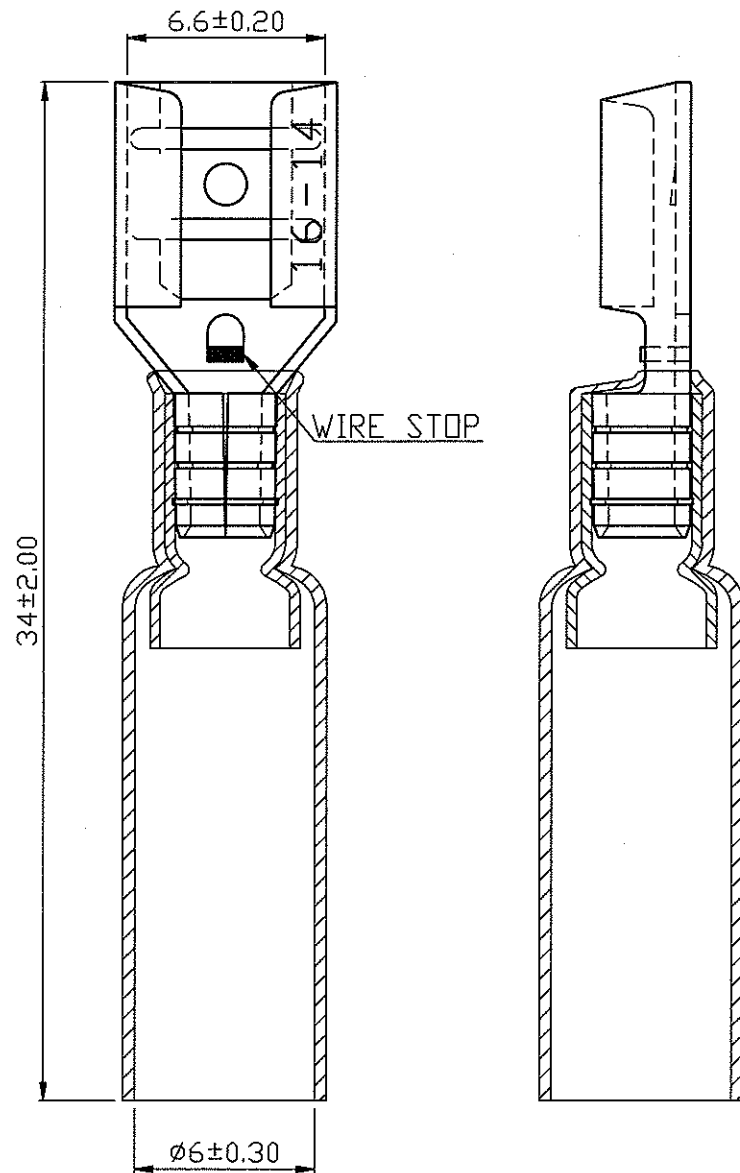

NOTE :

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	10	15	
- MAXIMUM ELECTRICAL RATING : 300 VOLTS MAX.
- SHRINK TEMP. : 150°C
- OPERATING TEMP. : -40°C~+105°C
- INSULATION MATERIAL : HIGH DENSITY PE.
- INSULATION MATERIAL : WITH COPPER SLEEVE ON BARREL
- INSULATEDN COLOR : BLUE
- WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
- TERMINAL MATERIAL : BRASS
- TERMINAL SURFACE TREATMENT : TIN PLATED
- TERMINAL THICKNESS : 0.40 mm
- NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	HEAT SHRINKABLE-FEMALE DISCONNECTORS "HD"(DOUBLE CRIMP TYPE)			UNIT
PART NO.	12274	MATERIAL	-----	APPROVE
NUMBER		SCALE	SHEET	PAGE CHECKED
DATE	2005/02/16	4/1	1-1	10F2 DRAWN

Morris Products Inc.