




73424 - SQUARE HEAD EMERGENCY LIGHT

WHITE HOUSING, HIGH OUTPUT

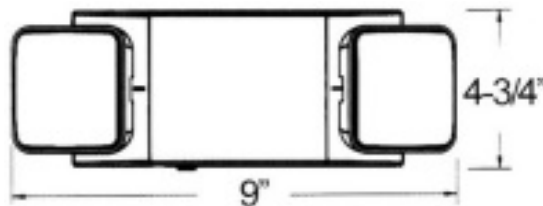

FEATURES

- Long Life Energy Saving LED Lamps
- Completely Self-Contained
- Fully Automatic Operation
- Push to Test Switch
- Automatic Low Voltage Disconnect (LVD)
- 120 or 277 VAC Operation
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of Less than 4 Watts for Red letters
- Injection-Molded, UL 94 V-O Flame Retardant, high impact, thermoplastic housing
- Fully adjustable glare free LED lamps
- Heads rotate 180 degrees + for maximum field flexibility
- Universal Mounting Canopy for Top or Back J-box Installation & 2 Snap-fit Face Plates
- Field replaceable chevron directional indicators
- Integral wiring channels to facilitate installation
- 3.6 Volt 1000 mAH Sealed Ni-Cad Rechargeable Maintenance-Free Battery
- 90 Minute Minimum Battery run Time
- Input Current: .22A 120V .10A 277V
- Input Wattage: 2.5W Remote Capable
- Environmentally-Coated, Solid State Charger
- Damp Location Rated, UL 924 Listed
- 3 Year Warranty

Part#	Type	Volts	Heads	Housing Color	Watts	Lumens Per Head
73424	High Output	120/277	2	White	1.8	76

TECHNICAL SPECIFICATIONS

Specifications

Input Rating Amps:	.22A@120V .10A@277V
Input Rating Watts:	1.8W
Frequency:	60 Hz
Voltage Rating:	120/277
Flammability Rating:	UL94V-0

Packaging

Box Qty	1
Master Carton Qty	6

Certifications

UL	UL 924
cUL	Yes
RoHS	Yes